



- Cable + Connectivity Solutions
- Control Solutions

# Ethernet Connectivity

Infrastructure solutions from a single source

# Efficiency in Automation

Cable • Connectivity • Cabinet • Control





# Welcome to LÜTZE

## Cable Solutions



**Efficiency in Automation** - A reflection of our company philosophy

As an experienced specialist in automation technology, with solutions for flexible and high flexing cables, cable assemblies, interfaces, current control and cabinet wiring, we have had a focus on efficiency for many years.

## Connectivity Solutions



LÜTZE defines Efficiency in Automation field as the use of sustainable products and solutions to further increase the performance of our products in our customers applications.

We realise this by using components for highly efficient control systems, products with above average life cycles and raising energy efficiency in control cabinets by means of the LSC wiring system.

## Cabinet Solutions



Efficiency in Automation reflects our efforts in striving for efficient working relationships with our customers: in a medium sized family owned company we have short communication channels and a high level of manufacturing competence.

The value of a product or a solution from LÜTZE is determined by its sustainable qualities. Every innovation will only be successful in the future if it has a long term positive effect. Therefore, we provide long lasting as well as highly efficient components.

## Control Solutions



Thus LÜTZE creates value through efficiency. LÜTZE provides answers and demonstrates how to handle resources responsibly, with our environment and our future in mind.

**LÜTZE - Efficiency in Automation**

**For more information on our solutions, please visit [www.luetze.com](http://www.luetze.com) or [www.lutze.com](http://www.lutze.com)**

## Transportation Solutions





# Business Management: Sustainable and forw



## The future is blue

Sustainable enterprise means thinking and planning ahead, understanding and embedding the belief that long lasting success is more important than short-term profit maximisation.

This is an attitude that has existed within LÜTZE for quite some time. Economic and environmental responsibilities complement each other well and are reflected in the sustainable management and

product policy - and from now in the **SkyBLUE** campaign.

We manufacture our products in a resourceful and energy-conscious manner. We use long lasting, environmentally-friendly materials. And our products, in turn, help our customers save energy and resources.

Good for everyone: for us, for the environment, for our customers a win-win-win situation.

# ard-looking

*„The competitiveness of our industry and of its suppliers depends quite substantially on how we succeed in developing practical results. The results that we produce together today, are our competitive advantages in the future.“*

Udo LÜTZE,

Member of the Executive Committee of  
the Green Carbody Innovation Alliance



## Goods with real value

The value of a product or a solution from LÜTZE is determined by its sustainable qualities as well. Every innovation is only as successful in the future if it has a long-term positive effect. Therefore, we provide long lasting as well as highly efficient components.

We are incorporating the necessary knowledge and manufacturing competence in numerous joint projects with the objective of improving energy efficiency and

sustainable technologies and industries. Thus, LÜTZE provides answers and demonstrates how to handle resources responsibly, with our environment and our future in mind.



# RoHS





# IIoT - Industrial Intern

## What is Industry 4.0?

A German government memo released way back in 2013 was one of the first times that 'Industrie 4.0' was mentioned.


The high-tech strategy document outlined a plan to almost fully computerise the manufacturing industry without the need for human involvement.



Industry 4.0 is another area where the Internet of Things looks to play a huge role thanks to the sheer volume of sensors and "things" that have the potential to feed information into it and add value to manufacturing processes. Projections on the industry have mentioned the IoT alongside

cyber-physical systems as ways in which a combination of software, sensors, processors and communications technology will underpin the very development of Industry 4.0.

# et of Things

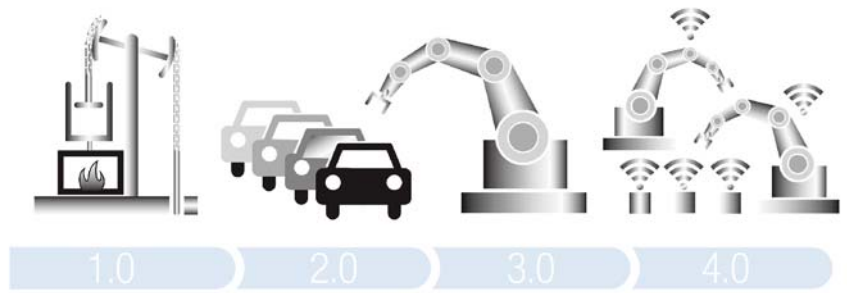

The first industrial revolution was the one that saw the transition from farming to factory production in the 19th Century.

The second ran from around the 1850s, and began with the introduction of steel, culminating in the early electrification of factories and the first signs of mass production.

In more recent times is the third industrial revolution that refers to the change from analogue, mechanical, and electronic technology to digital technology that took place from the late 1950s to the late 1970s.



## LÜTZE Connectivity

The smart machines of the future need reliable connections. Lütze has a large range of industrial ethernet cables and connectors and is capable of producing cable assemblies that provide users of automation equipment with the connections they need, using either RJ45, M12 or M8 connectors.

## Smart electronic fuses from Lütze

The control equipment on machines needs DC voltage, so the monitoring of these circuits is a logical next step as part of the IIoT concept.



The LOCC Box range from Lütze can provide complete information from the machine load circuits and communicate this information via

Ethercat/Profinet to facilitate external monitoring at either the machine level and or remotely.

# LÜTZE – Ethernet Connectivity

## LÜTZE Ethernet Connectivity - Solutions from a single source

The requirements placed on efficient manufacturing systems are becoming more and more complex. Increased networking between production and management means that more and more automation systems are requiring the use of PC-based controllers and Ethernet communication networks. Ethernet is the name of a widely used, standardised communication infrastructure with various communication media. Together with higher-level communication software, Ethernet is today the basis for a large number of industrial local networks. In contrast to the office environment, communication in automation technology requires open, transparent system solutions. The seamlessness of information is a major priority here. This means that it is necessary to plan, install and administer industrial networks in such a way that they function reliably under the toughest conditions and in the harshest environments, while exhibiting controllable behaviour. The correct selection of suitable cables, connection technology and components is thus a significant factor in reliability. In this area LÜTZE offers a seamless system for designing network infrastructures.

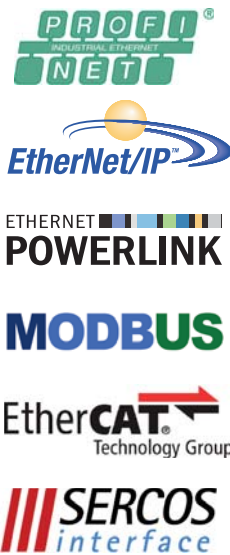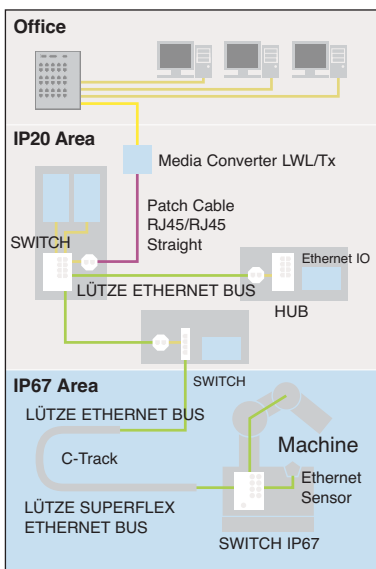

Thanks to our many years of experience in the planning and implementation of industrial networks and the necessary components, we are also able to develop customer-specific solutions to satisfy your requirements optimally.

## Ethernet in industrial applications

In industry, communication takes place in a hierarchical system consisting of plant, management and field levels. The use of Ethernet is standard at plant and management levels. At field level, field buses such as Profibus DP, CAN or other protocol variants are still dominant. The reason for this is the considerably higher or differing requirements at field level. Here the network encounters interference factors that can have a significant effect on transmission quality. The risk of interference due to vibrations, dirt, moisture or harmful substances is especially high at the connection points. To meet

## Switched Ethernet

## INFO

In industrial applications, the following transmission requirements apply:

- very high network availability
- small data packets
- timely transmission

In order to cope with these requirements, the network has to be subdivided into logical and physical segments. This makes it possible in most cases to limit communication links between network nodes to a sub network, without affecting the bandwidth of other sub networks. The load sharing means that the full bandwidth is available in each segment.

these requirements, LÜTZE supplies a solution that will stand up to the sometimes adverse conditions encountered in light and heavy industry, railway tunnels, on board ships, or in other environments. The simplest form of load sharing is achieved through the use of switches.

A network in which each node is assigned exactly one port of a switch is called switched Ethernet. Ethernet switches are used to resolve collision domains into simple point-to-point connections between the switch and the other network nodes (terminals, infrastructure components).


## Ethernet Switches

Simple switches work on the data link layer (OSI model, link 2), and can connect LANs with differing physical characteristics. If all of the protocols of

OSI-Layer	Classification	DoD-Layer	Classification	Protocol Example	Units	Coupling elements
7 Application	Application orientated	Application	End to End (Multihop)	HTTP FTP HTTPS SMTP LDAP NCP	Data	Gateway, Content-Switch, Layer 4-7-Switch
6 Presentation						
5 Session						
4 Transport	Transport orientated	Transport	Point to Point	TCP UDP SCTP SPX	Segments	Router, Layer-3-Switch
3 Network		Internet				
2 Data Link		Web entry		Ethernet Token Ring FDDI ARCNET	Frames	Bridge, Switch
1 Physical					Bits	Hub, Repeater

picture : ISO / OSI Reference Model

the upper layers in the network are the same, then the switch is protocol-transparent. When a packet is received, the switch processes the 48-bit long MAC-address and creates an entry for it in the SAT (Source Address Table), which stores, in addition to the MAC address, the physical Port at which it is received. Each port of a switch constitutes a separate network segment, with the entire network bandwidth being available to each of these segments. Each individual port of a switch can receive and transmit data. The speed required for this is achieved via an internal high-speed bus (backplane). Data buffers ensure that as far as possible no data packets are lost. As a result, the network performance is increased not only in the network as a whole, but also in the individual segments. Switches examine each incoming data packet for the MAC address of the target segment, and can forward it there directly. The particular advantage of switches is their ability to connect ports with each other directly, i.e. being able to establish dedicated links. Switches break the Ethernet bus structure down into a bus and star structure. Sub-segments with a bus structure are now coupled in a star pattern, each via one port of the switch. Packets can be transmitted between the individual ports at the maximum Ethernet speed. Another major advantage is simultaneous data transmission between different segments. This increases the bandwidth in the entire network. However, to make use of the full performance capability of the switch technology it is necessary to implement a suitable network topology. This requires distributing the data load as evenly as possible among the individual ports. Furthermore, it is advisable to connect systems that communicate a great deal with each other to the same switch. The goal of this is to reduce the quantity of data that travels through more than one segment.

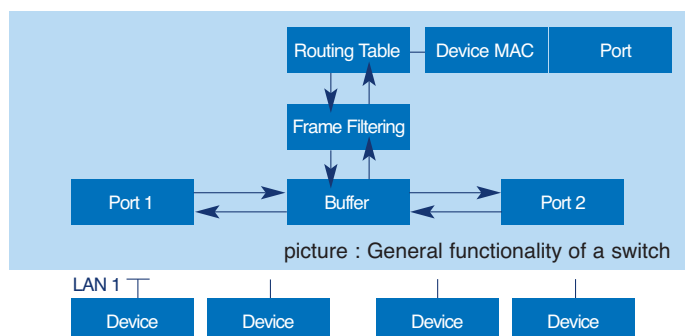

picture : General functionality of a switch



# LÜTZE – Ethernet Connectivity

## Cables - A lot depends on them

The classical Ethernet began with the coaxial cable. Today, new installations use only symmetric cables, so-called balanced cables, or fibre-optic cables.

## Copper cables

Various types of copper cable are used. The term "symmetric cable" does not refer to the structure of the cable, but rather exclusively to its electrical characteristics and the signal transmission. The symmetrical transmission of a signal requires two conductors; full duplex thus requires four conductors. A 10/100 MB Ethernet cable that is suitable for industrial use will thus have at least four conductors. The number of conductors increases by another four if the application requires 1Gbit.

## Twisted-Pair

In order to obtain the best possible interference suppression, the individual conductors have to be twisted. For different requirements, regarding the transmission, different types of twisted pair cables were developed. The difference between these cables is the shield :

### • UTP (Unshielded Twisted Pair):

The twisted signal pairs are stranded together without any screening under the outer jacket.

### • Overall shielded S/UTP or F/UTP:

The twisted pairs are stranded together and surrounded by a common screen made of a metal laminated polymer tape or a copper wire braid. The outer jacket encloses the screen.

### • Cables with shielded pairs FTP (Foiled Twisted Pair), also U/FTP, S/FTP: Each twisted pair is wrapped by a metallic screen (mostly a metal laminated polymer tape). In Germany often called PiMF (pair in metal foil). In most cases the PiMFs are stranded together and surrounded by a copper wire braid as a common screen. This provides an optimized EMC performance

The short term for shielded twisted pair cable - S/FTP, F/FTP or SF/FTP (Screened Foiled Twisted Pair) is used in a different way from various stan-

## CAT 2 - Class B

CAT 2 cables are suitable for maximum frequencies up to 1 or 1.5 MHz; they are used, for example, for cabling in buildings with an ISDN primary multiplex connection.

## CAT 3 - Class C

The 100BASE-T4 standard allows 100 Mbit/s over existing Category 3 installations, using all four conductor pairs. CAT 3 cables are no longer used in new installations; rather at least CAT 5 cables are used.

## CAT 5 - Class D

CAT 5 cables are most often encountered in installations today; they are used for signal transmission at high data transmission rates. Their specific standardised designation is EIA/TIA-568. CAT 5 cables are intended for operating frequencies up to 100 MHz. Due to the high signal frequencies, particular care must be taken during laying and assembly, especially for the connection points of the conductors. Category 5 cables are often used in structured cabling for computer networks, such as Fast Ethernet or Gigabit Ethernet. This has been encouraged by the widespread use of 1000BASE-T (Gigabit Ethernet), because it requires only one CAT 5 cable.

## CAT 5e - Class De

The CAT 5e cable is a more specialised version of CAT 5 that is mainly used in German speaking countries in Europe for 100BASE-T network connections over long distances. Carefully executed installations, originally made and approved as CAT 5, generally also satisfy the CAT 5e standard. The designations EIA/TIA-568A and EIA/TIA-568B are also used informally to mean the two assignments for the colour-coded conductor pairs to the connecting contact of the RJ45 connector that are defined in this standard; in this case, however, this does not say anything about the transmission quality.

## CAT 6 - Class E

CAT 6 cables are defined by EN50288. CAT 6 cables are intended for operating frequencies up to 300 MHz. The transmission speed suffers at longer lengths; however, slight excess lengths may be no problem, depending on the external influences. Ultimately reliability can be ensured by testing with an appropriate test device to verify compliance with the limit values of the current versions of EN50173-1, IS 11801 and EIA/TIA 568B2.1. The fields of application for CAT 6 are voice and data transmission, multimedia and ATM networks. Greater performance is provided by CAT 6a cables (500 MHz) .

## CAT 7 - Class F

CAT 7 cables have four individually shielded pairs of conductors (Screened/Foiled shielded Twisted Pair S/FTP) within an overall shield. CAT 7 cables are intended for operating frequencies up to 600 MHz. CAT 7 cables fulfill the requirements of standard IEEE 802.3an, and are thus suitable for 10-Gigabit Ethernet.

## Wiring Tips

According to the standardised approach, the combination of components of the same category is expected to achieve the correlating class. But experience reveals that this is not the case, especially when higher transmission performance is required. Therefore it is recommended to use matched components from a single source supplier especially in a harsh industrial environment.

Components of a higher category meet all the transmission requirements of the lower classes. They therefore provide an additional performance margin. For very critical applications (environment, EMC, distances) it is recommended to use this margin applying components of a higher category as required. Transmission safety can be achieved by testing the transmission performance using a suitable cabling tester which will verify the limits of the appropriate standards EN50173-1, ISO/IEC 11801, resp. EIA/TIA-568B2.1. Sometimes the terms EIA/TIA-568A and EIA/TIA-568B are used informally to show the different assignments of the colour coded pairs to the connector pins of the RJ45, in this case this is not a statement regarding the transmission quality.

## INFO



LÜTZE Cables of the category 5e offer generally an overall shield as braid (S/UTP).



LÜTZE provides category 6 and 7 shielded pair cables with an additional all-round braided-copper shield (S/FTP).

dards and various suppliers. In the current EN50173, these cables are designated "F" for a foil shield, and "S" for a copper mesh shield. The degree of coverage of the braid should be greater than 30% in order to achieve sufficient shielding against low-frequency fields. New designation according to ISO/IEC-11801 (2002)E is also : S/FTP (meshwork), F/FTP (foil), SF/FTP (braid+foil). Therefore the letter before the slash describes the overall shield, the letter behind the pair shield.

## Categories and Classes

CAT 3,5,6 or 7 describes the categories with regard to the cable and connector requirements. The transmission bandwidth is determined by the cable class (A - 100kHz, B - 1MHz, C - 16MHz, D - 100MHz, E - 300MHz, F - 600MHz). The requirements for the cable are defined in different parts of the standard EN 50288. The EN 50173 and ISO/IEC 11801 describe the installation of cables, connectors, and net structures.

## CAT 1 - Class A

Cat 1 cables are designed for maximum operating frequencies up to 100 kHz, and are thus not suitable for data transmission. They are used for voice transmission, for example in telephone applications. Only UTP cables.

# LÜTZE – Ethernet Connectivity

## Overview Data Rate / Transmission Medium

Ethernet	Data Rate MBit/s	Transmission Medium	IEEE
10Base5	10	RG 8 Coaxial Cable 50 Ohm, 500 m segment length	802.3
10Base2	10	RG 85 Coaxial Cable 50 Ohm, 500 m segment length	802.3a
10Broad36	10	Coaxial Cable 75 Ohm, max. Expansion 3.600 m	802.3b
10BaseT	10	Twisted Pair Cable, Kat 3, 100 m segment length	802.3i
10BaseFL	10	Multi Mode Fibre, 850 nm 2.000 m segment length	
10BaseFB	10	Multi Mode Fibre 850 nm 2.000 m segment length	
1000BaseT	1000	Twisted Pair Cable, Kat 5, 100 m segment length	802.3ab
1000BaseSX	1000	Multi Mode Fibre, 830 nm 550 m segment length	802.3z
1000BaseLX	1000	Multi Mode Fibre, 1.270 nm, 5.000 m segment length	802.3z
1000BaseCX	1000	Twinax-Copper Cable 150 Ohm, 25 m segment length	802.3z

Ethernet	Data Rate MBit/s	Transmission Medium
100BaseTX	100	Twisted Pair Cable, Kat 5, 100 m segment length
100BaseT2	100	Twisted Pair Cable, Kat 3, 100 m segment length, 2 x 2 Wire
100BaseT4	100	Twisted Pair Cable, Kat 3, 100 m segment length, 4 x 2 Wire
100BaseFX	100	Multi Mode Fibre, 1.300 nm, 2.000 m segment length
10GBaseSR	10	Seriell, Multi Mode Fibre, 850 nm, 2.300 m segment length, without WAN Adjustment
10GBaseSW	10	Serial Fibre Optic, 850 nm, 2.300 m segment length, with WAN Adjustment
10GBaseLR	10	Serial Fibre Optic, 1.310 nm, 2-10.000 m segment length, without WAN Adjustment
10GBaseLW	10	Serial Fibre Optic, 1.310 nm, 2-10.000 m segment length, with WAN Adjustment
10GBaseER	10	Serial Fibre Optic, 1.550 nm, 2-40.000 m segment length, without WAN Adjustment
10GBaseEW	10	Serial Fibre Optic, 1.550 nm, 2-40.000 m segment length, with WAN Adjustment
10GBaseLX4	10	Serial Fibre Optic, 1.310 nm, 2-10.000 m WWDM-Technology with 4 Channels

## Installation instructions for copper cables

## INFO

- Strip cables for as short a length as possible
- Never kink cables by more than 90°
- Minimum bending radius is four times the diameter
- Do not subject cables to twisting, elongation or tensile loads
- Do not crush cables when fastening them
- Apply shielding on the equipotential bonding over a large area, on both ends and with low impedance
- Apply shielding for several cables at a single point of the equipotential bonding
- Do not undo twisting of the individual conductors by more than 13 mm.

The current versions of relevant national and international laws, regulations and standards will always be binding. It may also be necessary to observe company standards. This then leads to additional requirements for installation, such as: Design in accordance with DIN EN 50174-1/2/3, Compliance with EMC Directives EN 55022, EN 50310 and DIN VDE 0878, Secure isolation between data and power cables, VDE 0804/DIN57804, Shielding measures, VDE 0100, TN-S, Power supply according to TN-S method, Observance of the earthing concept according to VDE 0100, Fire regulations, Accident prevention regulations, and perhaps others.

## Pin assignment

The most commonly used Ethernet connector is the so called RJ45 connector, which is available in shielded and unshielded variants. Of the RJ45 connector's eight pins, four are used for 10/100MBit/s, and all eight for 1000MBit/s.


## Pin assignment RJ45:

PIN-Nr.	10BaseT	100BaseT	1000BaseT
1	TD+ (Transmit)	TD+ (Transmit)	BI_DA+ (Bidirectional)
2	TD- (Transmit)	TD- (Transmit)	BI_DA- (Bidirectional)
3	RD+ (Recieve)	RD- (Recieve)	BI_DB+ (Bidirectional)
4	-	-	BI_DC+ (Bidirectional)
5	-	-	BI_DC- (Bidirectional)
6	RD- (Receive)	RD- (Receive)	BI_DB- (Bidirectional)
7	-	-	BI_DD+ (Bidirectional)
8	-	-	BI_DD- (Bidirectional)

## Colour coded according to EN 50173 - hard wiring

In the EN 50173 standard, two colour codings are defined for installation, namely T568A and T568B. The user is free to choose between them, but should ensure during installation that the selected coding is maintained throughout the entire installation. Mixing the two codings will result in malfunctions

PIN-No.	Pair (T568A)	Pair (T568B)	Colour (T568A)	Colour (T568B)
1	3	2		
2	3	2		
3	2	3		
4	1	1		
5	1	1		
6	2	3		
7	4	4		
8	4	4		



PIN Position


## Plug in Connector:

Plug in Connector Type	Connection	IEC	Organisation 67076-3 106	LÜTZE
RJ45	Bajonet	Version 1	IAONA, ODVA	
RJ45	Snap in	Version 2		
RJ45	Screw	Version 3		
RJ45	Push Pull	Version 4	PNO	
RJ45	with Lock	Version 5	PNO	
RJ45	Push Pull	Version 6	IAONA, IDA	•
RJ45	with Lock	Version 7	PNO	
RJ45	Screw	Version 8		
RJ45	Screw	Version 9		
RJ45	Pulse Lock	Version 10		
M12 D	Screw	IEC	IAONA, ODVA	
kod		61076-2-101	PNO	
LWL	LWL	IEC	PNO	
		60874-74		

# LÜTZE - Ethernet Connectivity


## Ethernet components need power:

The elimination of local power supplies by use of Power over Ethernet (PoE) can provide significant cost savings with systems such as VoIP, Web-Cams, embeded PCs, IP sensors, local automation and security systems.

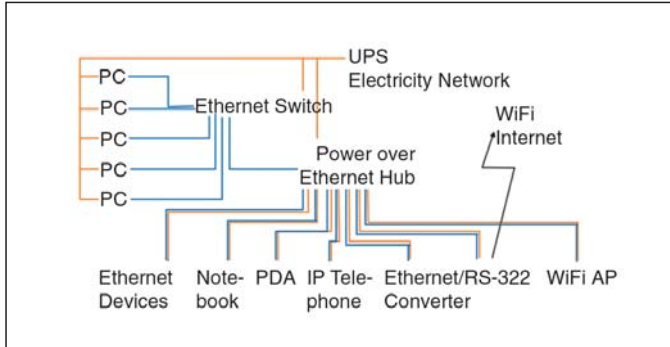


## Standardised as 802.3af:

- CAT5 Infrastructure for Data and Power
- Voltage between 44 and 57 Volt
- max. Current 550 mA
- max. Trigger Current 500 mA
- typical Current 10 mA ... 350 mA
- Overload recognition 350 mA - 500 mA
- mind. 5 mA-Idle Current

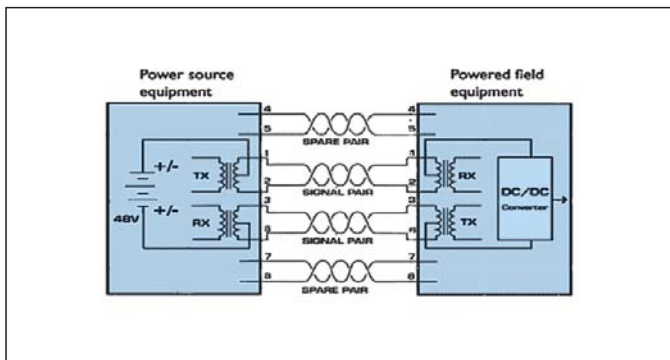


Power supply via data cables; Supply via the centre points of the isolating transformer:

Endpoint PSE Alternative A.

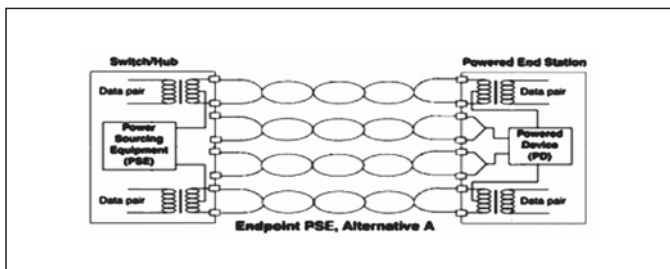


Power supply via free conductor pairs; Positive and negative voltage sides are transmitted via two conductor pairs  
Cannot be used for T4 transmission (Gbit Ethernet)

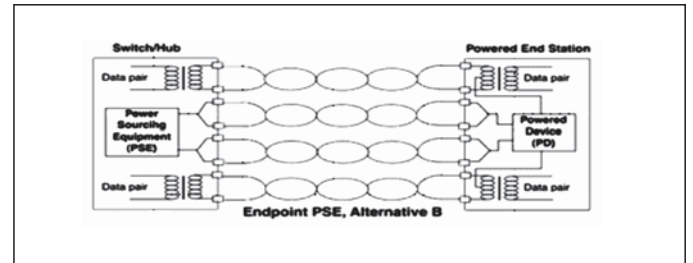

Endpoint PSE Alternative B.

Power supply via supply sources used; the power supply is looped into the data path

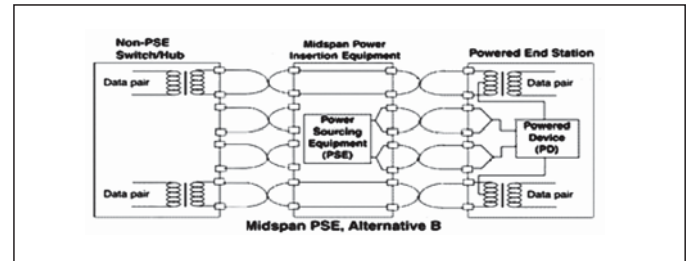

Midspan PSE, Alternative C.

## Comments on wiring the variants

In order to prevent voltage drops, all 4 pairs can be used for the power supply. The current trend is to make use of the unused conductor pairs, because this provides better insulation.

Wire	Variant A MDI-X	Variant A MDI	Variant B All
1	-V Port	+V Port	
2	-V Port	+V Port	
3	+V Port	-V Port	
4			+V Port
5			+V Port
6	+V Port	-V Port	
7			-V Port
8			-V Port



# Ethernet Connectivity · Product Overview

## Unmanaged Switches



4 port  
10/100 Mbit



8 port  
10/100 Mbit

Page 14                      Page 15

## Unmanaged Switches



5 port  
10/100 Mbit



5 port  
10/100/1000 Mbit



8 port  
10/100 Mbit



8 port  
10/100/1000 Mbit



16+2G port  
10/100/1000 Mbit



4+1,2 FX port  
10/100 Base TX

Page 16                      Page 17                      Page 18                      Page 19                      Page 20                      Page 21

## Unmanaged PoE Switches, PoE splitter



5 port  
10/100 Mbit




10/100/1000 Mbit

Page 22                      Page 23

# Ethernet Connectivity · Product Overview

## Ethernet Bus cables

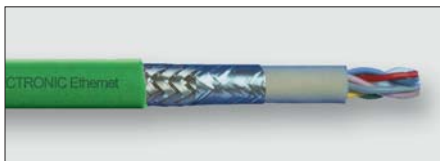

Standard

C-track  
compatible

Page 26

Page 27

## Actuator sensor interface network cables



PROFINET  
M12 / RJ45  
PVC cable

Page 29



PROFINET /  
ETHERNET  
RJ45/RJ45  
PVC cable

Page 30 / 31



Patch cable  
Cat5e / Cat.6

Page 32



PROFINET  
RJ45/RJ45  
PVC cable

Page 33



PROFINET  
RJ45/RJ45  
PVC cable

Page 34



PROFINET  
M12 panel  
connectors

Page 35

## Actuator sensor interface connector



RJ45 Industrial  
connector

Page 39



RJ45 Industrial  
connector

Page 40



RJ45 Industrial  
connector,  
angled

Page 41



RJ45 Module  
holder, female /  
IDC

Page 42



M12, Male  
D coded  
angled

Page 43



M12, Female  
D coded  
Cat 5e

Page 44



M12, Male  
X coded  
Cat 6A

Page 45



M12, Female  
X coded  
Cat 6A

Page 45

## Actuator sensor interface panel connector and module holder



RJ45  
Front installation

Page 47



M12 - RJ45  
Control cabinet  
bushing


Page 48

# Ethernet · Unmanaged switch 4 ports

10 / 100 Mbit, auto negotiation, Auto MDI/MDI-X, QoS  
4 Fast Ethernet ports, Broadcast storm protection  
AC/DC 24 V extended temperature range



Dimensions



Description	Part-No.	Type	PU
<b>without function carrier</b>			
Rated voltage	AC/DC 24 V (SELV, PELV)	779200.0401 S*	LCOS-SW-4P 1
<b>with function carrier</b>			
Rated voltage	AC/DC 24 V (SELV, PELV)	779201.0401 S*	LCOS-SW-4P 1

Part-No.	779200.0401	779201.0401
----------	-------------	-------------

## Note

Included in the delivery	–	Function carrier 22.5 mm, cannot be expanded with modules
Not included in the delivery	Function carrier and other accessories	other accessories, see „accessories“

## Communication

Standard	IEEE 802.3, 802.3u, 802.3x
LAN	10 / 100 Base-TX
Cable length (segment)	Max. 100 m
Transfer rate	max. 100 Mbit/s
Connection technology (data)	4 × RJ45
Status display communication	Link activity

## General

Rated voltage	AC/DC 24 V (SELV, PELV)
Operation voltage range	AC 19.2–28.8 V / DC 18–31.2 V
Connection technology (supply)	3-pin terminal clamp, push-in, RM 5.08 or via LCOS-FT Powerbus
Power consumption	1.2 W
Power output	–
Protection class	IP20
Installation position	any
Over voltage category	II
Degree of pollution	2
Application height	2000 m
Operation temperature range	–25 °C ... +70 °C
Storage temperature range	–40 °C ... +75 °C
Relative humidity (operation)	5 % - 95 % (non-condensing)
Relative humidity (storage)	0 % - 95 % (non-condensing)
Standards	EN 61000-6-2, EN 61000-6-4, EN 61010-1, UL 61010-2-196, EN 55022
Approvals	CE, cULus in preparation, DNV GL in preparation

## Safety

Reverse voltage protection	Yes
Isolating voltage Ethernet/supply/FE	1000 V

## Mechanics

Dimensions (w × h × d)	22.5 × 110.0 × 102.0 mm
Weight	– kg/piece
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Mounting	can be connected to LCOS function carrier 22.5 mm (accessories), hat rail mounting EN 60715

## Accessories

**Function carrier 22.5 mm, cannot be expanded with modules:**  
Part-No. 780201.225.1 | LCOS-FT-PE-225-00-00-1 | PU: 1 unit  
**Function carrier 22.5 mm, can be expanded with modules:**  
Part-No. 780402.225.1 | LCOS-FT-PE-225-0P-02-1 | PU: 1 unit  
**Function carrier 57.5 mm, with power supply DC 24 V, no FBS, plug-and-play:**  
Part-No. 780700.575.1 | LCOS-FTE-PE-575-NC-00-1 | PU: 1 unit  
**Side cover plate for function carrier:**  
Part-No. 780600.000.4 | LCOS-ZB-AD-00-1 | VE: 100 units  
**Plug-in terminal block, RM 5.08, 3-pin, 2.5 mm<sup>2</sup>:**  
Part-No. 780922.006.2 | LCOS-ZB-KL-FS-508-25-3 | VE: 10 units  
**Power bridge 1-pin insulated:**  
Part-No. 780961.001.2 | LCOS-ZB-PB-01-00 | VE: 10 unit

## Note

For AC supply, there must be external over-voltage protection that limits the voltage between the supply and the FE to below 1000 V.




# Ethernet · Unmanaged switch 8 ports

10 / 100 Mbit, auto negotiation, Auto MDI/MDI-X, QoS  
8 Fast Ethernet ports, Broadcast storm protection  
AC/DC 24 V extended temperature range



Dimensions



Description	Part-No.	Type	PU
<b>without function carrier</b>			
Rated voltage	AC/DC 24 V (SELV, PELV)	779200.0801 S*	LCOS-SW-8P 1
<b>with function carrier</b>			
Rated voltage	AC/DC 24 V (SELV, PELV)	779201.0801 S*	LCOS-SW-8P 1

Part-No.	779200.0801	779201.0801
----------	-------------	-------------

## Note

Included in the delivery	–	Function carrier 35 mm, cannot be expanded with modules
Not included in the delivery	Function carrier and other accessories	other accessories, see „accessories“

## Communication

Standard	IEEE 802.3, 802.3u, 802.3x
LAN	10 / 100 Base-TX
Cable length (segment)	Max. 100 m
Transfer rate	max. 100 Mbit/s
Connection technology (data)	8 × RJ45
Status display communication	Link activity

## General

Rated voltage	AC/DC 24 V (SELV, PELV)
Operation voltage range	AC 19.2–28.8 V / DC 18–31.2 V
Connection technology (supply)	3-pin terminal clamp, push-in, RM 5.08 or via LCOS-FT Powerbus
Power consumption	1.5 W
Power output	–
Protection class	IP20
Installation position	any
Over voltage category	II
Degree of pollution	2
Application height	2000 m
Operation temperature range	–25 °C ... +70 °C
Storage temperature range	–40 °C ... +75 °C
Relative humidity (operation)	5 % - 95 % (non-condensing)
Relative humidity (storage)	0 % - 95 % (non-condensing)
Standards	EN 61000-6-2, EN 61000-6-4, EN 61010-1, UL 61010-2-196, EN 55022
Approvals	CE, cULus in preparation, DNV GL in preparation

## Safety

Reverse voltage protection	Yes
Isolating voltage Ethernet/supply/FE	1000 V

## Mechanics

Dimensions (w × h × d)	35.0 × 110.0 × 102.0 mm
Weight	– kg/piece
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Mounting	can be connected to LCOS function carrier 35 mm (accessories), hat rail mounting EN 60715      connected to LCOS function carrier, hat rail mounting EN 60715

## Accessories

**Function carrier 35 mm, cannot be expanded with modules:**  
Part-No. 780201.350.1 | LCOS-FT-PE-350-00-00-1 | PU: 1 unit  
**Function carrier 35 mm, can be expanded with modules:**  
Part-No. 780402.350.1 | LCOS-FT-PE-350-0P-02-1 | PE: 1 unit  
**Function carrier 70 mm, with power supply DC 24 V, no FBS, plug-and-play:**  
Part-No. 780700.700.1 | LCOS-FTE-PE-700-NC-00-1 | PU: 1 unit  
**Side cover plate for function carrier:**  
Part-No. 780600.000.4 | LCOS-ZB-AD-00-1 | VE: 100 units  
**Plug-in terminal block, RM 5.08, 3-pin, 2.5 mm<sup>2</sup>:**  
Part-No. 780922.006.2 | LCOS-ZB-KL-FS-508-25-3 | VE: 10 units  
**Power bridge 1-pin insulated:**  
Part-No. 780961.001.2 | LCOS-ZB-PB-01-00 | VE: 10 unit

## Note

For AC supply, there must be external over-voltage protection that limits the voltage between the supply and the FE to below 1000 V.

# Ethernet · Unmanaged switch 5 ports


10 / 100 Mbit, autonegotiation, Auto MDI/MDI-X, DC 12 V – 48 V, redundant

5 Fast Ethernet ports, Broadcast storm protection


ESD 4 kV, surge 3 kV, expanded temperature range



## Dimensions



## PIN assignment



Description	Part-No.		Type	PU	
5 port, RJ45					
Operation temperature range	-10 °C ... +60 °C	772000	S*	unm. switch ET-SWU5ST	1
	-40 °C ... +75 °C	772001	S*	unm. switch ET-SWU5ET	1
Communication	772000		772001		
Standard	IEEE 802.3, 802.3u, 802.3x				
LAN	10 / 100 Base-TX				
Cable length (segment)	Max. 100 m				
Transfer rate	max. 100 Mbit/s				
Connection technology (data)	5 × RJ45				
Broadcast Storm Rate Limit	200 pps (200M), 20 pps (10M)				
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision				
General					
Operation voltage range	DC 12–48 V, redundant				
Power consumption	3 W				
Operation temperature range	-10 °C ... +60 °C				-40 °C ... +75 °C
Storage temperature range	-40 °C ... +85 °C				
Relative humidity (operation)	5 % - 95 % (non-condensing)				
Relative humidity (storage)	0 % - 95 % (non-condensing)				
Protection class	IP20				
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6				
Approvals	cULus, CE, FCC				
Safety					
ESD (Ethernet)	DC 4 kV				
Surge (EFT for power)	DC 3 kV				
Reverse voltage protection	Yes				
Rated over load protection	0.9 A @ DC 12 V				
Mechanics					
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm				
Weight	0.600 kg/piece				
Housing material	Metal				
Mounting	DIN rail mountable TS35 (EN 60715) Wall mounting				
Installation position	any				
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>				
Monitoring					
Power supply voltage monitoring	Relay, 1 normally open				
Switching voltage	AC 120 V / DC 28 V				
Switching current	1 A @ DC 24 V				
Isolation voltage	DC 500 V				

## Note


For more information on LED definition, see the data sheet.

# Ethernet · Unmanaged switches 5 ports


**10 / 100 / 1000 Mbit, autonegotiation, Auto MDI/MDI-X, DC 12 V / 24 V, redundant**  
**5 Fast Ethernet ports, frame transmission up to 9 kB (Jumbo frames)**  
**ESD 4 kV, surge 3 kV, expanded temperature range**



## Dimensions



## PIN assignment



Description	Part-No.		Type	PU	
5 port, RJ45					
Operation temperature range	-10 °C ... +60 °C	772010	S*	unm. switch ET-SWUG5ST	1
	-40 °C ... +75 °C	772011	S*	unm. switch ET-SWGU5ET	1
Communication	772010		772011		
Standard	IEEE 802.3, 802.3u, 802.3x				
LAN	10 / 100 Base-TX, 10 / 1000 Base-T				
Cable length (segment)	Max. 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)				
Transfer rate	max. 1000 Mbit/s				
Connection technology (data)	5 × RJ45				
Broadcast Storm Rate Limit	7926 pps				
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision				
General					
Operation voltage range	DC 12–48 V, redundant				
Power consumption	4.6 W				
Operation temperature range	-10 °C ... +60 °C		-40 °C ... +75 °C		
Storage temperature range	-40 °C ... +85 °C				
Relative humidity (operation)	5 % - 95 % (non-condensing)				
Relative humidity (storage)	0 % - 95 % (non-condensing)				
Protection class	IP20				
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6				
Approvals	cULus, CE, FCC				
Safety					
ESD (Ethernet)	DC 4 kV				
Surge (EFT for power)	DC 3 kV				
Reverse voltage protection	Yes				
Rated over load protection	0.9 A @ DC 12 V				
Mechanics					
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm				
Weight	0.600 kg/piece				
Housing material	Metal				
Mounting	DIN rail mountable TS35 (EN 60715)				
Installation position	any				
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>				
Monitoring					
Power supply voltage monitoring	Relay, 1 normally open				
Switching voltage	AC 120 V / DC 28 V				
Switching current	1 A @ DC 24 V				
Isolation voltage	DC 500 V				

## Note

For more information on LED definition, see the data sheet.




# Ethernet · Unmanaged switch 8 ports


10 / 100 Mbit, autonegotiation, Auto MDI/MDI-X, DC 12 V / 24 V, redundant  
8 Fast Ethernet ports, Broadcast storm protection  
ESD 4 kV, surge 3 kV, expanded temperature range



## Dimensions



## PIN assignment



Description	Part-No.		Type	PU	
8 port, RJ45					
Operation temperature range	-10 °C ... +60 °C	772002	S*	unm. switch ET-SWU8ST	1
	-40 °C ... +75 °C	772003	S*	unm. switch ET-SWU8ET	1
Communication	772002		772003		
Standard	IEEE 802.3, 802.3u, 802.3x				
LAN	10 / 100 Base-TX				
Cable length (segment)	Max. 100 m				
Transfer rate	max. 100 Mbit/s				
Connection technology (data)	8 × RJ45				
Broadcast Storm Rate Limit	200 pps (200M), 20 pps (10M)				
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision				
General					
Operation voltage range	DC 12–48 V, redundant				
Power consumption	5 W				
Operation temperature range	-10 °C ... +60 °C			-40 °C ... +75 °C	
Storage temperature range	-40 °C ... +85 °C				
Relative humidity (operation)	5 % - 95 % (non-condensing)				
Relative humidity (storage)	0 % - 95 % (non-condensing)				
Protection class	IP20				
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6				
Approvals	cULus, CE, FCC				
Safety					
ESD (Ethernet)	DC 4 kV				
Surge (EFT for power)	DC 3 kV				
Reverse voltage protection	Yes				
Rated over load protection	0.9 A @ DC 12 V				
Mechanics					
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm				
Weight	0.600 kg/piece				
Housing material	Metal				
Mounting	DIN rail mountable TS35 (EN 60715)				
Installation position	any				
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>				
Monitoring					
Power supply voltage monitoring	Relay, 1 normally open				
Switching voltage	AC 120 V / DC 28 V				
Switching current	1 A @ DC 24 V				
Isolation voltage	DC 500 V				

## Note


For more information on LED definition, see the data sheet.

# Ethernet · Unmanaged switch 8 ports


10 / 100 / 1000 Mbit, autonegotiation, Auto MDI/MDI-X, DC 12 V / 24 V, redundant  
8 Fast Ethernet ports, frame transmission up to 9 kB  
ESD 4 kV, Surge 3 kV



## Dimensions



## PIN assignment




Description	Part-No.	Type	PU	
Description	8 port, RJ45	772012 S*	unm. switch ET-SWGU8ST	1
Communication		772012		
Standard	IEEE 802.3, 802.3u, 802.3x			
LAN	10 / 100 Base-TX, 10 / 1000 Base-T			
Cable length (segment)	Max. 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)			
Transfer rate	max. 1000 Mbit/s			
Connection technology (data)	8 × RJ45			
Broadcast Storm Rate Limit	7926 pps			
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision			
General				
Rated voltage	–			
Operation voltage range	DC 12–48 V, redundant			
Power consumption	4.6 W			
Power output	–			
Operation temperature range	-10 °C ... +60 °C			
Storage temperature range	-40 °C ... +85 °C			
Relative humidity (operation)	5 % - 95 % (non-condensing)			
Relative humidity (storage)	0 % - 95 % (non-condensing)			
Protection class	IP20			
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6			
Approvals	cULus, CE, FCC			
Safety				
ESD (Ethernet)	DC 4 kV			
Surge (EFT for power)	DC 3 kV			
Reverse voltage protection	Yes			
Rated over load protection	1.6 A @ DC 12 V			
Mechanics				
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm			
Weight	0.600 kg/piece			
Housing material	Metal			
Mounting	DIN rail mountable TS35 (EN 60715)			
Installation position	any			
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>			
Monitoring				
Power supply voltage monitoring	Relay, 1 normally open			
Switching voltage	AC 120 V / DC 28 V			
Switching current	1 A @ DC 24 V			
Isolation voltage	DC 500 V			
Note				
For more information on LED definition, see the data sheet.				

# Ethernet · Unmanaged switch 16+2G ports


10 / 100 / 1000 Mbit, autonegotiation, Auto MDI/MDI-X, DC 12 V / 24 V, redundant  
Simple and flexible expansion to fibre optic with SFP base



## Dimensions



## PIN assignment




Description	Part-No.	Type	PU	
Description	16 port + 2G, RJ45/SFP	772014 S*	unm. switch ET-SWGU18ST	1
Communication		772014		
Standard	IEEE 802.3, 802.3ab, 802.3u, 802.3x, 802.3z			
LAN	100 Base-TX, 10 / 1000 Base-T, 1000 Base-SX/LX/LHX/XD/ZX/EZX			
Cable length (segment)	Max. 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)			
Transfer rate	Ethernet: 10/100 Mbit/s, Gigabit Chopper: 10/100/1000 Mbit/s			
Connection technology (data)	16 RJ45 + 2 RJ45/SFP (mini GBIC)			
Broadcast Storm Rate Limit	—			
Status display communication	PWR1, PWR2, P-Fail, Gigabit Chopper: Link/Activity, Speed (1000MBps), Gigabit SFP: Link/Activity			
General				
Operation voltage range	DC 12–48 V, redundant			
Power consumption	6.5 W			
Operation temperature range	-10 °C ... +60 °C			
Storage temperature range	-40 °C ... +85 °C			
Relative humidity (operation)	5 % - 95 % (non-condensing)			
Relative humidity (storage)	0 % - 95 % (non-condensing)			
Protection class	IP20			
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6			
Approvals	cULus, CE, FCC			
Safety				
ESD (Ethernet)	DC 4 kV			
Surge (EFT for power)	DC 3 kV			
Reverse voltage protection	Yes			
Rated over load protection	3.5 A @ DC 12 V			
Mechanics				
Dimensions (w × h × d)	79.0 × 152.0 × 105.0 mm			
Weight	1.100 kg/piece			
Housing material	Metal			
Mounting	DIN rail mountable TS35 (EN 60715)			
Installation position	any			
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>			
Monitoring				
Power supply voltage monitoring	Relay, 1 normally open			
Switching voltage	AC 120 V / DC 28 V			
Switching current	1 A @ DC 24 V			
Isolation voltage	DC 500 V			
Note				
For more information on LED definition, see the data sheet.				

# Ethernet · Unmanaged switches 4+1/2FX ports


**10/100Base TX, 100Base FX Multi Mode, Auto MDI/MDI-X, DC 24 V – 48 V, redundant**  
**4 Fast Ethernet ports, 1× Multimode SC, 2× Single Mode SC**  
**ESD 4 kV, surge 3 kV, full/half duplex operation, broadcast storm protection**



## Dimensions



## PIN assignment



Description		Part-No.		Type	PU
Description	4 port, RJ45, 1 port Multimode	772005	S*	unm. switch ET-SWU4-1STSC	1
	4 port, RJ45, 2 port single mode	772007	S*	unm. switch ET-SWU4-2STSC	1

Communication	772005	772007
Standard	IEEE 802.3, 802.3u, 802.3x	
LAN	10 / 100 Base-TX, 100 Base-FX	
Cable length (segment)	Copper max. 100 m, multi-mode fibre max. 2000 m	
Transfer rate	max. 1000 Mbit/s	
Connection technology (data)	4 × RJ45, 1 × SC or 4 × RJ45, 2 × SC	
Broadcast Storm Rate Limit	200 pps (200M), 20 pps (10M)	
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision	
Fibre-optic cables (Multi Mode)		
Wavelength	1310 nm	–
Tx Power	-14 / -20 dBm	–
Rx sensitivity	-31 dBm	–
Parameters	50/125 µm, 62.5/125 µm	–
Fibre-optic cables (Single Mode)		
Wavelength	–	1310 nm
Tx Power	–	-8 / -15 dBm
Rx sensitivity	–	-34 dBm
Parameters	–	9/125 µm
General		
Operation voltage range	DC 24–48 V, redundant	
Power consumption	5 W (1SC), 6.5 W (2SC)	
Operation temperature range	-10 °C ... +60 °C	
Storage temperature range	-40 °C ... +85 °C	
Relative humidity (operation)	5 % - 95 % (non-condensing)	
Relative humidity (storage)	0 % - 95 % (non-condensing)	
Protection class	IP20	
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6	
Approvals	cULus, CE, FCC	
Safety		
ESD (Ethernet)	DC 4 kV	
Surge (EFT for power)	DC 3 kV	
Reverse voltage protection	Yes	
Rated over load protection	0.9 A @ DC 12 V (1SC), 1.6 A @ DC 12 V (2SC)	
Mechanics		
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm	
Weight	0.600 kg/piece	
Housing material	Metal	
Mounting	DIN rail mountable TS35 (EN 60715)	
Installation position	any	
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>	
Monitoring		
Power supply voltage monitoring	Relay, 1 normally open	
Switching voltage	AC 120 V / DC 28 V	
Switching current	1 A @ DC 24 V	
Isolation voltage	DC 500 V	

## Note

For more information on LED definition, see the data sheet.



# Ethernet · Unmanaged PoE switches 5 ports



10 / 100 Mbit, Auto MDI/MDI-X, DC 24 V – 48 V, redundant

5 Fast Ethernet ports, autonegotiation


ESD 4 kV, Surge 3 kV



## Dimensions



## PIN assignment



Description	Part-No.	Type	PU
Description	PoE 5 port, 48 V 772020 S*	unm. PoE switch ET-PU5ST	1
	PoE 5 port, 24/48 V 772021 S*	unm. PoE switch ET-PU5AST	1
<b>Communication</b>	<b>772020</b>	<b>772021</b>	
Standard	IEEE 802.3, 802.3u, 802.3x, 802.3af		
LAN	10 / 100 Base-TX		
Cable length (segment)	Max. 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)		
Transfer rate	max. 100 Mbit/s		
Connection technology (data)	5 × RJ45		
Broadcast Storm Rate Limit	—		
Status display communication	P1, P2, P-Fail, 10/100T(x): link/activity, duplex/collision		
<b>General</b>			
Operation voltage range	DC 48 V redundant	DC 24–48 V, redundant	
Power consumption	65 W full load PoE	62.5 W full load PoE	
Operation temperature range	-10 °C ... +60 °C		
Storage temperature range	-40 °C ... +85 °C		
Relative humidity (operation)	5 % - 95 % (non-condensing)		
Relative humidity (storage)	0 % - 95 % (non-condensing)		
Protection class	IP20		
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6		
Approvals	cULus, CE, FCC		
<b>Safety</b>			
ESD (Ethernet)	DC 4 kV		
Surge (EFT for power)	DC 3 kV		
Reverse voltage protection	Yes		
Rated over load protection	15,4 W @ 48 V (per PoE port)		
<b>Mechanics</b>			
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm	48.6 × 140.0 × 95.0 mm	
Weight	0.600 kg/piece	0.800 kg/piece	
Housing material	Metal		
Mounting	DIN rail mountable TS35 (EN 60715)		
Installation position	any		
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>		
<b>Monitoring</b>			
Power supply voltage monitoring	Relay, 1 normally open		
Switching voltage	AC 120 V / DC 28 V		
Switching current	1 A @ DC 24 V		
Isolation voltage	DC 500 V		

## Note


For more information on LED definition, see the data sheet.

# Ethernet · PoE splitter

**10 / 100 / 1000 Mbit, PoE input and data output**  
**12.95 W with DC 24 V, DC 48 V IN, DC 24 V OUT**  
**IEC 802.3af compatible, -40°C – +75°C, ESD 4 kV, surge 3 kV**



## Dimensions




## PIN assignment



Output DC 24V

Description	Part-No.	Type	PU	
Description	Power splitter	772022 S*	PoE Splitter ET-PSPET	1
Communication		772022		
Standard	IEEE 802.3, 802.3u, 802.3x, 802.3af, 802.3ab			
LAN	10 / 100 Base-TX, 10 / 1000 Base-T			
Cable length (segment)	Max. 100 m (4-wire Cat.5e)			
Transfer rate	max. 100 Mbit/s			
Connection technology (data)	PoE IN, OUT: RJ 45			
Broadcast Storm Rate Limit	–			
Status display communication	Power, Link/Activity, Duplex/Collision			
General				
Rated voltage	–			
Operation voltage range	DC 44–57 V			
Power consumption	17.8 W @ 48 V			
Power output	12.95 W @ 24 V			
Operation temperature range	-40 °C ... +75 °C			
Storage temperature range	-40 °C ... +85 °C			
Relative humidity (operation)	5 % - 95 % (non-condensing)			
Relative humidity (storage)	0 % - 95 % (non-condensing)			
Protection class	IP20			
Standards	UL 60950-1, CAN/CSA-C22.2 No. 60950, USA-FCC Part 15 CISPR22, EN 55011, EN 55022 Class A, EN 61000-3-2/3, EN 55024, IEC 61000-4-2/3/4/5/6/8, EN 61000-6-2, IEC 60068-2-27, IEC 60068-2-32, IEC 60068-2-6			
Approvals	cULus, CE, FCC			
Safety				
ESD (Ethernet)	DC 4 kV			
Surge (EFT for power)	DC 3 kV			
Reverse voltage protection	Yes			
Rated over load protection	0.539 A @ DC 24 V			
Mechanics				
Dimensions (w × h × d)	37.0 × 140.0 × 95.0 mm			
Weight	0.600 kg/piece			
Housing material	Metal			
Mounting	DIN rail mountable TS35 (EN 60715)			
Installation position	any			
Connection device	Screw terminal plug-in 0.20 mm <sup>2</sup> – 2.5 mm <sup>2</sup>			
Monitoring				
Power supply voltage monitoring	–			
Switching voltage	–			
Switching current	–			
Isolation voltage	–			
Note				
For more information on LED definition, see the data sheet.				

# LÜTZE - Ethernet cables • Overview

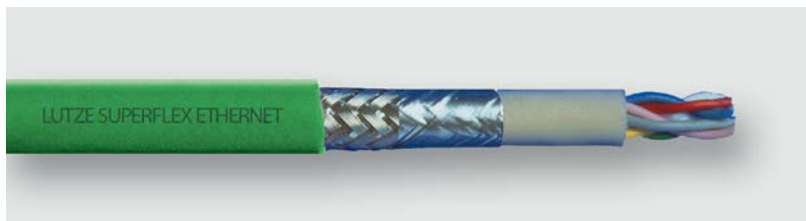

## ELECTRONIC Industrial Ethernet / PROFINET / ETHERCAT

<b>Category</b>	Cat5	Cat5	Cat6a
<b>Application according to</b>	ProfiNet Type A	Profinet Type B	
<b>Dimensions</b>	2x2xAWG22/1	2x2xAWG22/7	4x2xAWG22/1
<b>Part-No.</b>	104301	104307	104397
<b>Screen</b>	SF / UTQ	SF / UTC	S / FTP
<b>Jacket</b>	PVC	PVC	PVC
<b>UL</b>	CMG, PLTC, AWM 20201 600 V	CMG, PLTC, AWM 20201 600 V	CMG, PLTC, AWM 2570 600 V

## ELECTRONIC Industrial Ethernet / Ethernet IP

<b>Category</b>	Cat5e	Cat5e	Cat6a	Cat7
<b>Dimensions</b>	4x2xAWG 26/7	4x2xAWG 24/7	4x2xAWG 26/7	4x2xAWG 26/7
<b>Part-No.</b>	104335	104336	104338	104331
<b>Screen</b>	SF / UTP	SF / UTP	S / FTP	S / FTP
<b>Jacket</b>	PVC	PVC	PVC	PVC
<b>UL</b>	CMG	CMG	CMG	CMG

## SUPERFLEX Industrial Ethernet / ProfiNet / Ethercat

<b>Category</b>	Cat5	Cat5
<b>Dimensions</b>	2x2xAWG 22/19	2x2xAWG 22/7
<b>Part-No.</b>	104302	104303
<b>Screen</b>	SF / UTQ	SF / UTC
<b>Jacket</b>	PUR	PUR
<b>UL</b>	CMX	CMX


## SUPERFLEX Industrial Ethernet / Ethernet IP

<b>Category</b>	Cat5e	Cat5e	Cat5e	Cat6
<b>Dimensions</b>	2x2xAWG 26/19	4x2xAWG 24/19	4x2xAWG 26/19	4x2xAWG 26/19
<b>Part-No.</b>	104379	104337	104396	104347
<b>Screen</b>	SF / UTQ	SF / UTP	SF / UTP	SF / UTP
<b>Jacket</b>	PUR	PUR	PUR	PUR
<b>UL</b>	AWM	AWM	AWM	CMX

# LÜTZE - Ethernet Cables • Transmission Parameters


min. Near End Crosstalk (NEXT)

Frequenz	min. Near End Crosstalk (NEXT)			[Unit]
	EN 50288-2-2	EN 50288-5-2	EN 50288-4-2	
	Cat. 5e	Cat. 6	Cat. 7	
1 MHz	65,3	66,0	80,0	dB
4 MHz	56,3	65,3	80,0	dB
10 MHz	50,3	59,3	80,0	dB
16 MHz	47,2	56,2	80,0	dB
20 MHz	45,8	54,8	80,0	dB
31,25 MHz	42,9	51,9	80,0	dB
62,5 MHz	38,4	47,4	75,1	dB
100 MHz	35,3	44,3	72,4	dB
155 MHz	-	41,4	69,6	dB
200 MHz	-	39,8	67,9	dB
250 MHz	-	38,3	66,5	dB
300 MHz	-	-	65,3	dB
600 MHz	-	-	60,8	dB

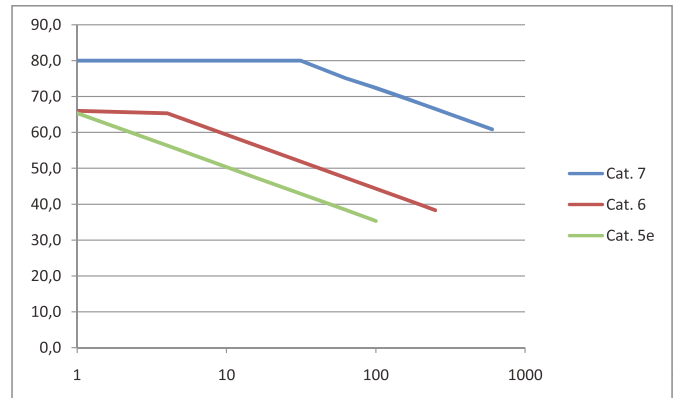


min. Far End Crosstalk (FEXT)

Frequenz	min. Far End Crosstalk (FEXT)			[Unit]
	EN 50288-2-2	EN 50288-5-2	EN 50288-4-2	
	Cat. 5e	Cat. 6	Cat. 7	
1 MHz	63,8	66,0	80,0	dB
4 MHz	51,8	58,0	80,0	dB
10 MHz	43,8	50,0	74,0	dB
16 MHz	39,7	45,9	69,9	dB
20 MHz	37,8	44,0	68,0	dB
31,25 MHz	33,9	40,1	64,1	dB
62,5 MHz	27,9	34,1	58,1	dB
100 MHz	23,8	30,0	54,0	dB
155 MHz	-	26,2	50,2	dB
200 MHz	-	24,0	48,0	dB
250 MHz	-	22,0	46,0	dB
300 MHz	-	-	44,5	dB
600 MHz	-	-	38,4	dB

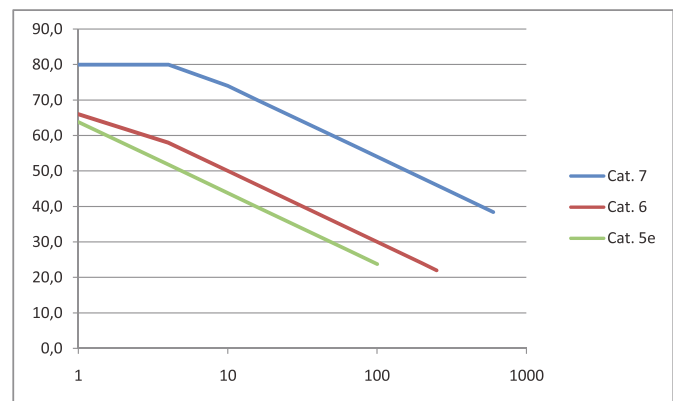


max. Attenuation (α)

Frequenz	max. Attenuation (α)			[Unit]
	EN 50288-2-2	EN 50288-5-2	EN 50288-4-2	
	Cat. 5e	Cat. 6	Cat. 7	
1 MHz	3,2	3,1	2,9	dB/100m
4 MHz	6,0	5,8	5,5	dB/100m
10 MHz	9,5	9,0	8,5	dB/100m
16 MHz	12,1	11,4	10,8	dB/100m
20 MHz	13,6	12,8	12,1	dB/100m
31,25 MHz	17,1	16,1	15,2	dB/100m
62,5 MHz	24,8	23,2	21,7	dB/100m
100 MHz	32,0	29,9	27,8	dB/100m
155 MHz	-	38,0	35,0	dB/100m
200 MHz	-	43,7	40,1	dB/100m
250 MHz	-	49,5	45,3	dB/100m
300 MHz	-	-	50,0	dB/100m
600 MHz	-	-	73,3	dB/100m

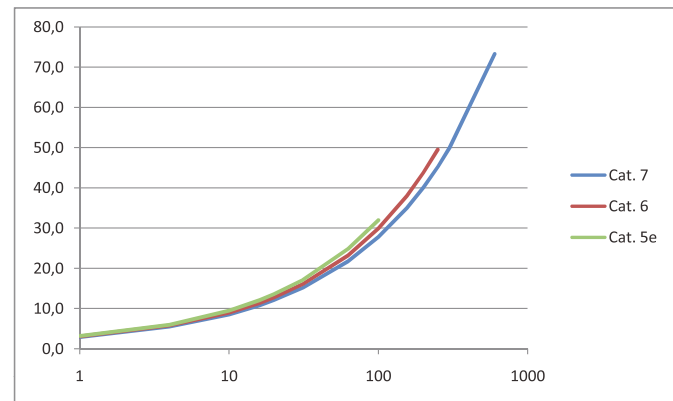

Return Loss (RL)


Frequenz	Return Loss (RL)			[Unit]
	EN 50288-2-2	EN 50288-5-2	EN 50288-4-2	
	Cat. 5e	Cat. 6	Cat. 7	
4 MHz	23,0	23,1	23,1	dB
8 MHz	24,5	24,5	24,5	dB
10 MHz	25,0	25,0	25,0	dB
16 MHz	25,0	25,0	25,0	dB
20 MHz	25,0	25,0	25,0	dB
31,25 MHz	23,6	23,6	23,6	dB
62,5 MHz	21,5	21,5	21,5	dB
100 MHz	20,1	20,1	20,1	dB
155 MHz	-	18,8	18,8	dB
200 MHz	-	18,0	18,0	dB
250 MHz	-	17,3	17,3	dB
350 MHz	-	-	17,3	dB
600 MHz	-	-	17,3	dB

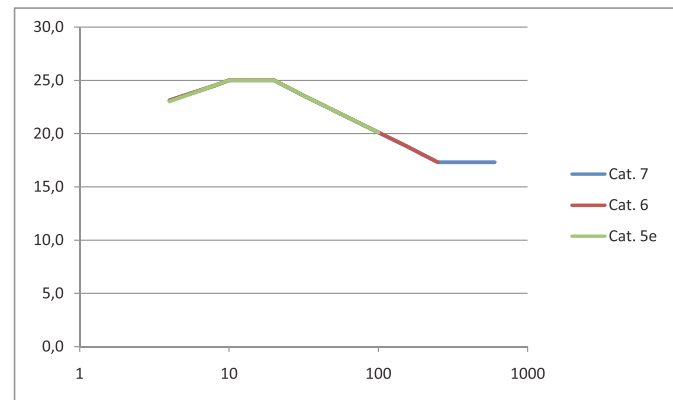



# PVC Bus cables · ETHERNET

## LÜTZE ELECTRONIC ETHERNET (C) PVC

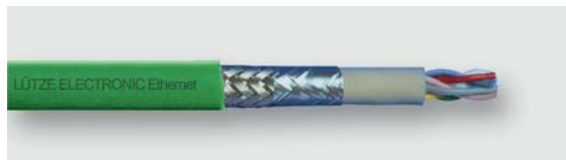

### Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- For fixed installation or mobile use without continuous flexing in automation technology, transport, conveyor technology and machine tools

### Properties

- High active and passive interference resistance (EMC)
- Silicone free
- RoHS-compliant

### Technical data

Rated voltage	125 V
Test voltage	AC 1500 V
Impedance	approx. 100 Ω
Loop resistance	AWG 22: ≤ 115 mΩ/m AWG 24: ≤ 165 mΩ/m AWG 26: ≤ 273 mΩ/m
Operating capacitance wire-wire	approx. 48 pF/m
Temperature range moving	-10 °C ... +70 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	15×D
Minimum bending radius fixed	10×D
Burning behavior according to	IEC 60332-3-24 CMG: FT4 UL 1685
Conformity	CE RoHS REACH
Approvals	PLTC CMG cULus cURus

### Construction


- Conductor: AWG conductor, CU-wire bare
- Conductor insulation: Special Polyolefin
- Overall shield: Foil shield, Braid shield, Tinned copper wires, optical cover approx. 85%
- Jacket material: PVC
- Surface: adhesion-free, matt
- Jacket color: green RAL 6018

Part-No.		Number of strands/cross-section/ strand colors	Outer Ø mm	Weight kg/100 m	Cu-Index kg/100 m
<b>ELECTRONIC Industrial Ethernet/Profinet/EtherCat</b>					
104301	S*	(2×2×AWG22/1)StC AWM 20201 Cat.5e Star quad stranding white, yellow, blue, orange	6.5	6.8	3.2
104307	S*	(2×2×AWG22/7)StC AWM 20201 Cat.5e Star quad stranding white, yellow, blue, orange	6.5	6.9	3.2
104397	S*	(4×(2×AWG22/1)St)C AWM 2570 Cat.6 <sub>A</sub> stranded pairs white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	9.6	9.6	5.3
<b>ELECTRONIC Industrial Ethernet/Ethernet IP</b>					
104335	S*	(4×2×AWG26/7)StC Cat.5e stranded pairs white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	6.3	5.5	3.0
104336	S*	(4×2×AWG24/7)StC Cat.5e stranded pairs white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	7.3	6.9	3.8
104338	S*	(4×(2×AWG26/7)St)C Cat.6 <sub>A</sub> stranded pairs white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	6.4	5.8	3.3
104331	S*	(4×(2×AWG26/7)St)C Cat.7 stranded pairs white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	6.4	5.8	3.3

CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

# PUR Bus cables · ETHERNET · C-track compatible

## LÜTZE SUPERFLEX® ETHERNET (C) PUR For highest requirements

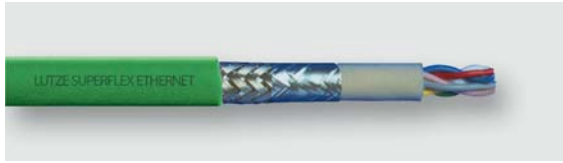

### Application

- For the cabling of industrial field bus systems with the globally accepted TCP/IP protocol
- For continuous flexing use e.g. in c-tracks or free movement in the automation technology, transport and conveyor technology, machine tool manufacture

### Properties

- High active and passive interference resistance (EMC)
- Silicone free
- Halogen free
- RoHS-compliant

### Technical data


Rated voltage	300 V
Test voltage	AC 1500 V
Impedance	approx. 100 Ω
Loop resistance	AWG 22: ≤ 110 mΩ/m AWG 24: ≤ 159.5 mΩ/m AWG 26: ≤ 280 mΩ/m
Operating capacitance wire-wire	approx. 48 pF/m
Temperature range moving	-30 °C ... +70 °C
Temperature range fixed	-40 °C ... +80 °C
Minimum bending radius moving	12×D
Minimum bending radius fixed	6×D
Burning behavior according to	IEC 60332-1 DIN EN 60332-1-2 VDE 0482 322-1-2 UL 1581 Part VW-1 Flame Test UL FT1
Halogen free according to	DIN EN 60754-1 IEC 60754-1
Conformity	CE RoHS REACH
Approvals	CMX cULus

### Construction

- Conductor: AWG conductor, CU-wire bare
- Conductor insulation: Special Polyolefin
- Overall shield: Braid shield, Tinned copper wires, optical cover approx. 85%
- Jacket material: PUR
- Surface: adhesion-free, matt
- Jacket color: green RAL 6018

Part-No.		Number of strands/cross-section/ strand colors	Outer Ø mm	Weight kg/100 m	Cu-Index kg/100 m
<b>SUPERFLEX Industrial Ethernet/ProfiNet/Ethercat</b>					
104302	S*	(2×2×AWG22/19)C Cat.5e Star quad stranding blue, white, yellow, orange	6.6	6.3	3.2
104303	S*	(2×2×AWG22/7)C Cat.5e Star quad stranding blue, white, yellow, orange	6.5	6.5	3.0
104401	S*	(4×2×AWG24/7)StC AWM 21198 Cat.6A Elements stranded together white, blue, white, orange, white, green, white, brown	8.9	8.8	4.0
<b>SUPERFLEX Industrial Ethernet/Ethernet IP</b>					
104379	S*	(2×2×AWG26/19)StC AWM 21198 Cat.5e Star quad stranding white, blue, yellow, orange	5.3	3.5	1.8
104337	S*	(4×2×AWG24/19)C AWM 21198 Cat.5e stranded layers white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	7.8	8.5	4.4
104396	S*	(4×2×AWG26/19)StC AWM 21198 Cat.5e stranded layers white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	6.7	5.1	2.8
104347	S*	(4×2×AWG26/19)StC Cat.6 stranded layers white/blue, blue, white/orange, orange, white/green, green, white/ brown, brown	7.9	7.4	3.4


CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

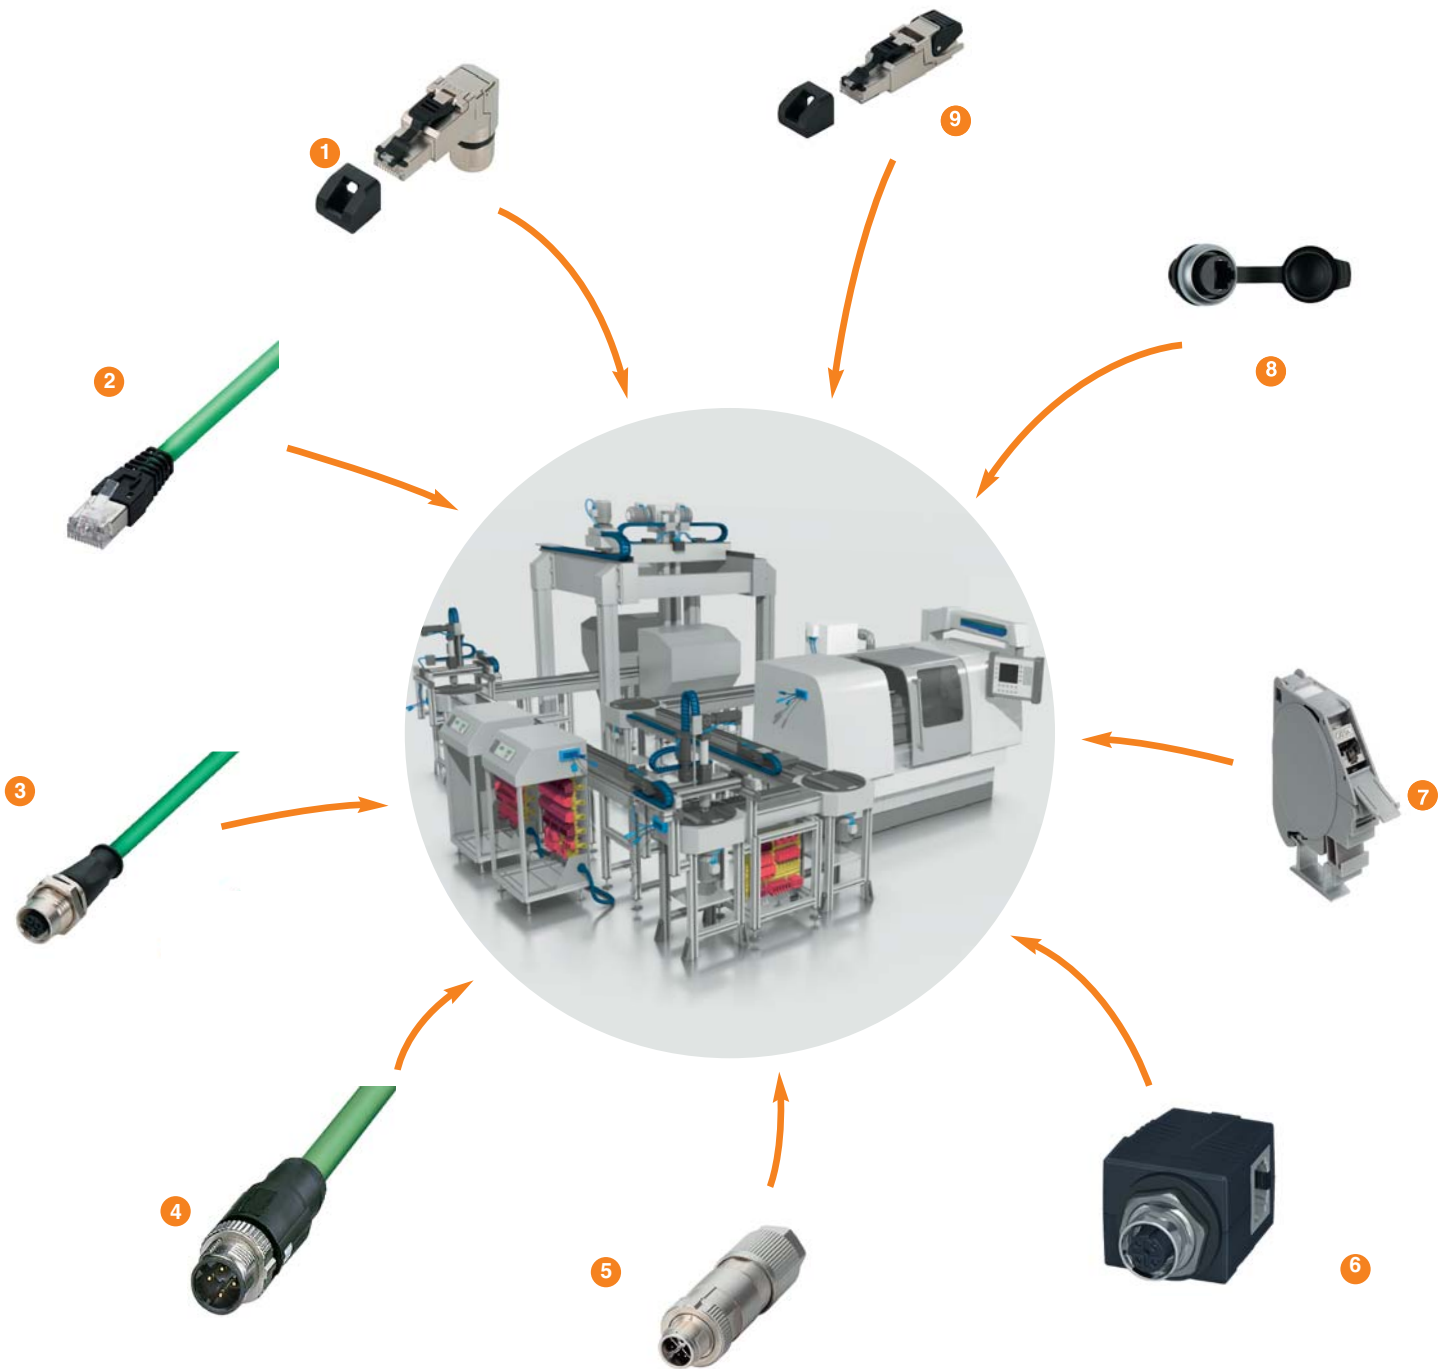

- |                                     |   |
|-------------------------------------|---|
| ① RJ45 industrial connector, angled | ⑤ M12 Male X-coded                            |
| ② RJ45 connector                    | ⑥ M12 / RJ45 control cabinet bushing          |
| ③ M12 panel connector               | ⑦ RJ45 Module holder                          |
| ④ M12 connector                     | ⑧ RJ45 panel connector for front installation |
|                                     | ⑨ RJ45 connector                              |

# Actuator sensor interface · Network cables PROFINET

## Male RJ45 straight to female M 12 straight with PVC cable, Cat 5e self-locking screwed connection

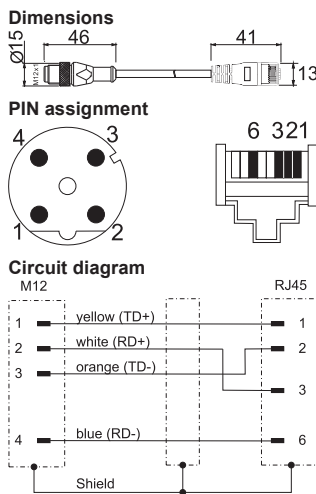


Description	Part-No.	Type	PU
Cable length	0.3 m	192014.0030 S* STG4-RJ45/STG4-M12/PN PVC 0,3M	1
	0.6 m	192014.0060 S* STG4-RJ45/STG4-M12/PN PVC 0,6M	1
	1.0 m	192014.0100 S* STG4-RJ45/STG4-M12/PN PVC 1,0M	1
	1.5 m	192014.0150 S* STG4-RJ45/STG4-M12/PN PVC 1,5M	1
	2.0 m	192014.0200 S* STG4-RJ45/STG4-M12/PN PVC 2,0M	1
	5.0 m	192014.0500 S* STG4-RJ45/STG4-M12/PN PVC 5,0M	1

Technical data						
Rated voltage U <sub>N</sub>	DC 24 V					
Rated voltage max.	30 V					
Rated current	1.5 A					
Pole number	4					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Coding	D					
Shielding	360°					
General						
Form male 1	RJ45					
Form male 2	M 12					
Test voltage	1000 V					
Degree of pollution	—					
Insulation resistance at 20 °C	≥ 1000 MΩ×km					
Contact resistance	< 20 mΩ					
Protection class	IP20					
Housing material	TPU PA					
Color of the housing	black					
Contact material	CuSn, gold-plated					
Thread material	Zinc die-casting, nickel-plated					
Number of conductors/cross-section	(2×2×AWG22/7)					
Number of conductors	4					
Conductor color	various					
Jacket material	PVC					
Jacket color	green RAL 6018					
Conductor insulation	TPE-O					
Cable diameter	6.5 mm					
Minimum bending radius fixed	6×D					
Minimum bending radius moving	12×D					
Mounting	Breakaway torque 0.4 Nm					
Temperature range connector	-25 °C ... +85 °C					
Temperature range fixed	-30 °C ... +80 °C					
Temperature range moving	-5 °C ... +70 °C					
Weight (kg/piece)	0.035	0.055	0.083	0.117	0.151	0.340
Accessories	Part-No.		Type			PU
Torque setting tool M 12	490091		DM-SET M12			1



# Actuator sensor interface · Network cables PROFINET


## Male RJ45 straight to female RJ45 straight with PVC cable, Cat 5e 4-pin

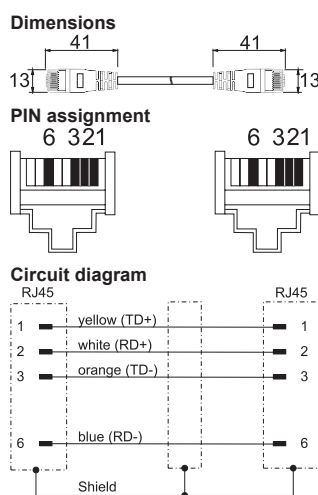

Description		Part-No.		Type		PU
Cable length	0.3 m	192016.0030	S*	STG4-RJ45/STG4-RJ45/PN PVC 0,3M	1	
	0.6 m	192016.0060	S*	STG4-RJ45/STG4-RJ45/PN PVC 0,6M	1	
	1.0 m	192016.0100	S*	STG4-RJ45/STG4-RJ45/PN PVC 1,0M	1	
	1.5 m	192016.0150	S*	STG4-RJ45/STG4-RJ45/PN PVC 1,5M	1	
	2.0 m	192016.0200	S*	STG4-RJ45/STG4-RJ45/PN PVC 2,0M	1	
	5.0 m	192016.0500	S*	STG4-RJ45/STG4-RJ45/PN PVC 5,0M	1	
Technical data						
Rated voltage U <sub>N</sub>			DC 50 V			
Rated voltage max.			– V			
Rated current			1.5 A			
Pole number			4			
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Coding	–					
Shielding	360°					
General						
Form male 1		RJ45 male straight				
Form male 2		RJ45 Male straight				
Test voltage		1000 V				
Degree of pollution		–				
Insulation resistance at 20 °C		≥ 1000 MΩ×km				
Contact resistance		< 20 mΩ				
Protection class		IP20				
Housing material		PA				
Color of the housing		black				
Contact material		CuSn, gold-plated				
Thread material		–				
Number of conductors/cross-section		(2×2×AWG22/7)				
Number of conductors		4				
Conductor color		various				
Jacket material		PVC				
Jacket color		green RAL 6018				
Conductor insulation		TPE-O				
Cable diameter		6.5 mm				
Minimum bending radius fixed		6×D				
Minimum bending radius moving		12×D				
Mounting		–				
Temperature range connector		-25 °C ... +85 °C				
Temperature range fixed		-30 °C ... +80 °C				
Temperature range moving		-5 °C ... +70 °C				
Weight (kg/piece)	0.035	0.055	0.083	0.117	0.151	0.340

# Actuator sensor interface · Network cables Ethernet

## Male RJ45 straight to female RJ45 straight with PVC cable, Cat 5e 8-pin

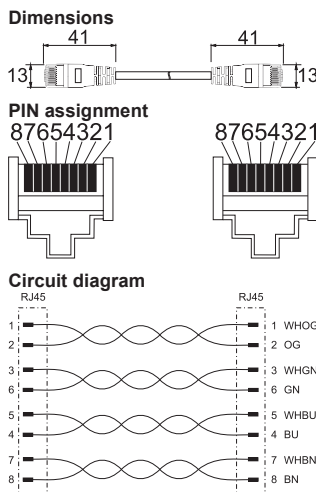

Description			Part-No.	Type			PU
Cable length	0.3 m		192018.0030	S*	STG8-RJ45/STG8-RJ45/ET PVC 0,3M		1
	0.6 m		192018.0060	S*	STG8-RJ45/STG8-RJ45/ET PVC 0,6M		1
	1.0 m		192018.0100	S*	STG8-RJ45/STG8-RJ45/ET PVC 1,0M		1
	1.5 m		192018.0150	S*	STG8-RJ45/STG8-RJ45/ET PVC 1,5M		1
	2.0 m		192018.0200	S*	STG8-RJ45/STG8-RJ45/ET PVC 2,0M		1
	5.0 m		192018.0500	S*	STG8-RJ45/STG8-RJ45/ET PVC 5,0M		1
Technical data							
Rated voltage U <sub>N</sub>				DC 50 V			
Rated voltage max.				– V			
Rated current				1.5 A			
Pole number				8			
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	
Coding	–						
Shielding	360°						
General							
Form male 1	RJ45 male straight						
Form male 2	RJ45 Male straight						
Test voltage	1000 V						
Degree of pollution	–						
Insulation resistance at 20 °C	≥ 1000 MΩ×km						
Contact resistance	< 20 mΩ						
Protection class	IP20						
Housing material	PA						
Color of the housing	black						
Contact material	CuSn, gold-plated						
Thread material	–						
Number of conductors/cross-section	(4×2×AWG26/7)						
Number of conductors	8						
Conductor color	various						
Jacket material	PVC						
Jacket color	green RAL 6018						
Conductor insulation	TPE-O						
Cable diameter	6.3 mm						
Minimum bending radius fixed	6×D						
Minimum bending radius moving	12×D						
Mounting	–						
Temperature range connector	-25 °C ... +85 °C						
Temperature range fixed	-30 °C ... +70 °C						
Temperature range moving	-5 °C ... +70 °C						
Weight (kg/piece)	0.032	0.049	0.071	0.098	0.126	0.279	

# Actuator sensor interface · Patch cable, shielded

## Patch cable Cat.5e/Cat.6



### Application

- Ethernet network wiring

### Properties

- Straight connector
- Assignment according to EIA/TIA 568B
- Moulded sleeve with length imprint (not for cable carrier suitable and industrial design)
- Various colors available (not for cable carrier suitable and industrial design)

#### • Cat.5e PVC:

PVC (4x2xAWG26/7) SF/UTP  
assignment according to TIA/EIA 568B  
flame-retardant IEC 60332-1  
extruded anti-kink sleeve with catch protection

#### • Cat.5e cable carrier suitable PUR:

PUR yellow (4x2xAWG26/19) S/UTP  
prefabricated RJ45 male  
Oil resistance in accordance with EN60811-2-1  
Alternating bending stress test (with load) in accordance with VDE 0472 T603

#### • Cat.6 LSZH:

(4x2xAWG27/7) S/FTP  
flame-retardant IEC 60332-1  
halogen-free IEC 60754-2  
silicone free  
extruded anti-kink sleeve with catch protection

#### • Cat.6 industrial design PUR:

PUR red (4x2xAWG27/7) S/FTP  
Pre-fabricated RJ45 male  
Resistant to mineral oil, ASTM oil and UV radiation,  
highly abrasion-resistant  
flame-retardant IEC60332-1  
halogen-free IEC 60754  
low-smoke IEC61034  
UV-resistant IEC60068-2-5  
ozone resistant EN60811-2-1  
suitable for outdoor areas, not for laying directly in earth

### Technical data

Connector	Shielded RJ45, 3μ–50μ AU
Wiring	according to EIA/TIA 568B 1:1 or crossover
Compatibility	Fully plug compatible to IEC 60603-7
Note	Standard lengths: 0.5 m / 1.0 m / 2.0 m / 3.0 m / 5.0 m / 10.0 m


Part-No.		Number of conductors/cross-section	Jacket color	Sleeve color	Wiring	Cable length m
<b>Cat.5e PVC</b>						
192000.0100	S*	(4x2xAWG26)	grey	grey	1:1	1
192022.0100	S*	(4x2xAWG26)	blue	blue	1:1	1
192030.0100	S*	(4x2xAWG26)	green	green	1:1	1
192010.0100	S*	(4x2xAWG26)	grey/UL cable	grey	1:1	1
<b>Cat.5e PVC</b>						
192050.0100	S*	(4x2xAWG26/19)	grey	red	Crossover	1
<b>Cat.5E C-track compatible PUR</b>						
192300.0100	S*	(4x2xAWG27)	yellow	yellow	1:1	1
<b>Cat.6 LSZH</b>						
192100.0100	S*	(4x2xAWG27)	grey	grey	1:1	1
192112.0100	S*	(4x2xAWG27)	yellow	yellow	1:1	1
192130.0100	S*	(4x2xAWG27)	green	green	1:1	1
<b>Cat.6 industrial version PUR</b>						
192201.0100	S*	(4x2xAWG27/7)	red	black	1:1	1

# Actuator sensor interface · Network cables PROFINET


Male M12 straight with PUR cable, shielded 360°, open end  
self-locking screwed connection  
c-track compatible, halogen free




## Dimensions



## PIN assignment



## Circuit diagram



Description	Part-No.	Type	PU
Cable length	2.0 m	475300.0200 S* STG4-M12/PN 2M-PUR	1
	5.0 m	475300.0500 S* STG4-M12/PN 5M-PUR	1
	10.0 m	475300.1000 S* STG4-M12/PN 10M-PUR	1

## Technical data

Rated voltage $U_N$	AC/DC 24 V		
Rated voltage max.	30 V		
Rated current	4 A		
Pole number	4		
Cable length (m)	2.0	5.0	10.0
Status indication	—		
Current Consumption	— mA		
Coding	D		
Shielding	360°		

## General

Form male 1	M 12 male straight		
Nominal insulation voltage	250 V		
Test voltage	1500 V		
Degree of pollution	3		
Insulation resistance at 20 °C	$\geq 1000 \text{ M}\Omega \times \text{km}$		
Contact resistance	$< 5 \text{ m}\Omega$		
Flamability according to UL 94	V0		
Protection class	IP65/67		
Housing material	TPU		
Contact material	CuSn, gold-plated		
Thread material	Zinc die-casting, nickel-plated		
Material sealing ring	—		
Number of conductors/cross-section	$1 \times 4 \times \text{AWG } 22/7$		
Jacket material	PUR		
Jacket color	green RAL 6018		
Conductor insulation	PO		
Cable diameter	6.5 mm		
Bending radius	$10 \times D$		
Storage temperature range	$-40 \text{ °C} \dots +90 \text{ °C}$		
Temperature range connector	$-25 \text{ °C} \dots +90 \text{ °C}$		
Temperature range fixed	$-40 \text{ °C} \dots +70 \text{ °C}$		
Temperature range moving	$-40 \text{ °C} \dots +70 \text{ °C}$		
Mechanical service life	—		
Weight (kg/piece)	0.140	0.330	0.640
Approvals	—		

Accessories	Part-No.	Type	PU
Torque setting tool M 12	490091	DM-SET M12	1



# Actuator sensor interface · Network cables PROFINET


Male M12 straight on male M12 straight with PUR cable, shielded 360°  
self-locking screwed connection  
c-track compatible, halogen free




## Dimensions



## PIN assignment



## Circuit diagram



Description	Part-No.	Type	PU
Cable length	0.3 m	475400.0030 S* STG4-M12/STG4-M12/PN 0,3M PUR	1
	0.6 m	475400.0060 S* STG4-M12/STG4-M12/PN 0,6M PUR	1
	1.0 m	475400.0100 S* STG4-M12/STG4-M12/PN 1,0M PUR	1
	1.5 m	475400.0150 S* STG4-M12/STG4-M12/PN 1,5M PUR	1
	2.0 m	475400.0200 S* STG4-M12/STG4-M12/PN 2,0M PUR	1
	5.0 m	475400.0500 S* STG4-M12/STG4-M12/PN 5,0M PUR	1

## Technical data

Rated voltage $U_N$	AC/DC 24 V					
Rated voltage max.	30 V					
Rated current	4 A					
Pole number	4					
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Status indication	—					
Current Consumption	— mA					
Coding	D					
Shielding	360°					

## General

Form male 1	M 12 male straight					
Form male 2	M 12 male straight					
Nominal insulation voltage	250 V					
Test voltage	1500 V					
Degree of pollution	3					
Insulation resistance at 20 °C	$\geq 1000 \text{ M}\Omega \times \text{km}$					
Contact resistance	$< 5 \text{ m}\Omega$					
Flamability according to UL 94	V0					
Protection class	IP65/67					
Housing material	TPU					
Contact material	CuSn, gold-plated					
Thread material	Zinc die-casting, nickel-plated					
Material sealing ring	—					
Number of conductors/cross-section	$1 \times 4 \times \text{AWG } 22/7$					
Jacket material	PUR					
Jacket color	green RAL 6018					
Conductor insulation	PP					
Cable diameter	6.5 mm					
Bending radius	$10 \times D$					
Storage temperature range	$-30^\circ\text{C} \dots +90^\circ\text{C}$					
Temperature range connector	$-25^\circ\text{C} \dots +90^\circ\text{C}$					
Temperature range fixed	$-40^\circ\text{C} \dots +80^\circ\text{C}$					
Temperature range moving	$-30^\circ\text{C} \dots +70^\circ\text{C}$					
Mechanical service life	—					
Weight (kg/piece)	0.060	0.070	0.090	0.110	0.150	0.325
Approvals	—					


Accessories	Part-No.	Type	PU
Torque setting tool M 12	490091	DM-SET M12	1

# Actuator sensor interface · Network cables PROFINET


## M12 panel connectors using PG9 thread for rear panel installation, open end Female - D coded (Ethernet Cat. 5e) shielded




### Dimensions



### PIN assignment



### Circuit diagram



Description	Part-No.	Type	PU
Cable length	2.0 m	475500.0200 S* KUGE4-M12/PN 2M PUR	1
	5.0 m	475500.0500 S* KUGE4-M12/PN 5M PUR	1
	10.0 m	475500.1000 S* KUGE4-M12/PN 10M PUR	1

### Technical data

Rated voltage $U_N$	AC/DC 24 V		
Rated voltage max.	30 V		
Rated current	4 A		
Pole number	4		
Cable length (m)	2.0	5.0	10.0
Status indication	—		
Current Consumption	— mA		
Coding	D		
Shielding	360°		


### General

Form male 1	M 12 female		
Nominal insulation voltage	250 V		
Test voltage	1500 V		
Degree of pollution	3		
Insulation resistance at 20 °C	≥ 1000 MΩ×km		
Contact resistance	< 5 mΩ		
Flamability according to UL 94	—		
Protection class	IP65/67		
Housing material	TPU		
Contact material	CuSn, gold-plated		
Thread material	Zinc die-casting, nickel-plated		
Material sealing ring	—		
Number of conductors/cross-section	1×4×AWG22/7		
Jacket material	PUR		
Jacket color	green RAL 6018		
Conductor insulation	PP		
Cable diameter	6.5 mm		
Bending radius	10 × D		
Storage temperature range	-40 °C ... +90 °C		
Temperature range connector	-25 °C ... +90 °C		
Temperature range fixed	-40 °C ... +80 °C		
Temperature range moving	-30 °C ... +70 °C		
Mechanical service life	—		
Weight (kg/piece)	0.140	0.330	0.640
Approvals	—		

Accessories	Part-No.	Type	PU
Torque setting tool M 12	490091	DM-SET M12	1

# Actuator sensor interface · Network cables PROFINET

**Male RJ45 straight to female M12 straight with PUR cable, Cat 5e**  
**self-locking screwed connection**  
**c-track compatible, halogen free**

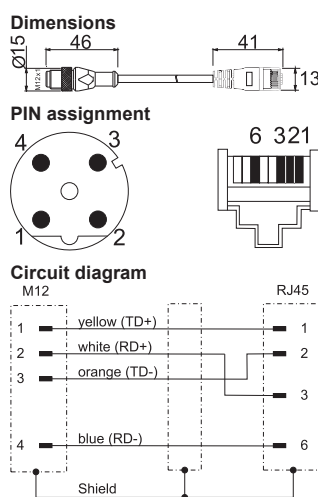


Description	Part-No.	Type	PU
Cable length	0.3 m	192013.0030 S* STG4-RJ45/STG4-M12/PN PUR 0,3M	1
	0.6 m	192013.0060 S* STG4-RJ45/STG4-M12/PN PUR 0,6M	1
	1.0 m	192013.0100 S* STG4-RJ45/STG4-M12/PN PUR 1,0M	1
	1.5 m	192013.0150 S* STG4-RJ45/STG4-M12/PN PUR 1,5M	1
	2.0 m	192013.0200 S* STG4-RJ45/STG4-M12/PN PUR 2,0M	1
	5.0 m	192013.0500 S* STG4-RJ45/STG4-M12/PN PUR 5,0M	1

Technical data						
Rated voltage U <sub>N</sub>			DC 24 V			
Rated voltage max.			30 V			
Rated current			1.5 A			
Pole number			4			
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0
Coding			D			
Shielding			360°			
General						
Form male 1			RJ45 male straight			
Form male 2			M 12 male straight			
Test voltage			1000 V			
Degree of pollution			—			
Insulation resistance at 20 °C			≥ 1000 MΩ×km			
Contact resistance			< 20 mΩ			
Protection class			IP20			
Housing material			TPU PA			
Color of the housing			black			
Contact material			CuSn, gold-plated			
Thread material			Zinc die-casting, nickel-plated			
Number of conductors/cross-section			(2×2×AWG22/7)			
Number of conductors			4			
Conductor color			various			
Jacket material			PUR			
Jacket color			green RAL 6018			
Conductor insulation			TPE-O			
Cable diameter			6.5 mm			
Minimum bending radius fixed			6×D			
Minimum bending radius moving			12×D			
Mounting			Breakaway torque 0.4 Nm			
Temperature range connector			-25 °C ... +85 °C			
Temperature range fixed			-40 °C ... +80 °C			
Temperature range moving			-30 °C ... +70 °C			
Weight (kg/piece)	0.035	0.054	0.080	0.113	0.145	0.340
Accessories		Part-No.		Type		PU
Torque setting tool M 12		490091		DM-SET M12		1

# Actuator sensor interface · Network cables PROFINET


## Male RJ45 straight to female RJ45 straight with PUR cable, Cat 5e c-track compatible, halogen free

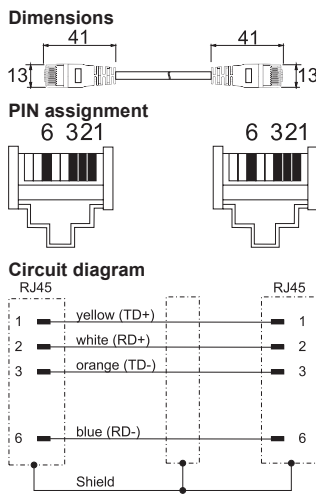

Description		Part-No.		Type			PU
Cable length	0.3 m	192015.0030	S*	STG4-RJ45/STG4-RJ45/PN PUR 0,3M			1
	0.6 m	192015.0060	S*	STG4-RJ45/STG4-RJ45/PN PUR 0,6M			1
	1.0 m	192015.0100	S*	STG4-RJ45/STG4-RJ45/PN PUR 1,0M			1
	1.5 m	192015.0150	S*	STG4-RJ45/STG4-RJ45/PN PUR 1,5M			1
	2.0 m	192015.0200	S*	STG4-RJ45/STG4-RJ45/PN PUR 2,0M			1
	5.0 m	192015.0500	S*	STG8-RJ45/STG8-RJ45/PN 5,0M PUR			1
Technical data							
Rated voltage U <sub>N</sub>				DC 50 V			
Rated voltage max.				– V			
Rated current				1.5 A			
Pole number				4			
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	
Coding	–						
Shielding	360°						
General							
Form male 1			RJ45 male straight				
Form male 2			RJ45 male straight				
Test voltage			1000 V				
Degree of pollution			–				
Insulation resistance at 20 °C			≥ 1000 MΩ×km				
Contact resistance			< 20 mΩ				
Protection class			IP20				
Housing material			PA				
Color of the housing			black				
Contact material			CuSn, gold-plated				
Thread material			–				
Number of conductors/cross-section			(2×2×AWG22/7)				
Number of conductors			4				
Conductor color			various				
Jacket material			PUR				
Jacket color			green RAL 6018				
Conductor insulation			TPE-O				
Cable diameter			6.5 mm				
Minimum bending radius fixed			6×D				
Minimum bending radius moving			12×D				
Mounting			–				
Temperature range connector			-25 °C ... +85 °C				
Temperature range fixed			-30 °C ... +80 °C				
Temperature range moving			-30 °C ... +70 °C				
Weight (kg/piece)	0.035	0.054	0.080	0.113	0.145	0.340	

# Actuator sensor interface · Network cables Ethernet

## Male RJ45 straight to female RJ45 straight with PUR cable, Cat5e c-track compatible, halogen free

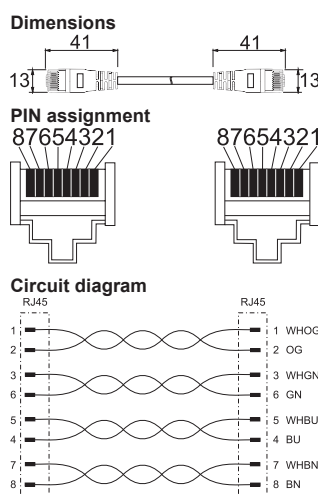

Description			Part-No.	Type			PU
Cable length	0.3 m		192017.0030	S*	STG8-RJ45/STG8-RJ45/ET PUR 0,3M		1
	0.6 m		192017.0060	S*	STG8-RJ45/STG8-RJ45/ET PUR 0,6M		1
	1.0 m		192017.0100	S*	STG8-RJ45/STG8-RJ45/ET PUR 1,0M		1
	1.5 m		192017.0150	S*	STG8-RJ45/STG8-RJ45/ET PUR 1,5M		1
	2.0 m		192017.0200	S*	STG8-RJ45/STG8-RJ45/ET PUR 2,0M		1
	5.0 m		192017.0500	S*	STG8-RJ45/STG8-RJ45/ET PUR 5,0M		1
Technical data							
Rated voltage U <sub>N</sub>				DC 50 V			
Rated voltage max.				– V			
Rated current				1.5 A			
Pole number				8			
Cable length (m)	0.3	0.6	1.0	1.5	2.0	5.0	
Coding	–						
Shielding	360°						
General							
Form male 1			RJ45 male straight				
Form male 2			RJ45 male straight				
Test voltage			1000 V				
Degree of pollution			–				
Insulation resistance at 20 °C			≥ 1000 MΩ×km				
Contact resistance			< 20 mΩ				
Protection class			IP20				
Housing material			PA				
Color of the housing			black				
Contact material			CuSn, gold-plated				
Thread material			–				
Number of conductors/cross-section			(4×2×AWG26/19)				
Number of conductors			8				
Conductor color			various				
Jacket material			PUR				
Jacket color			green RAL 6018				
Conductor insulation			TPE-O				
Cable diameter			6.7 mm				
Minimum bending radius fixed			6×D				
Minimum bending radius moving			12×D				
Mounting			–				
Temperature range connector			-25 °C ... +85 °C				
Temperature range fixed			-40 °C ... +80 °C				
Temperature range moving			-30 °C ... +70 °C				
Weight (kg/piece)	0.031	0.046	0.066	0.092	0.118	0.431	



# Actuator sensor interface


## Industrial connector RJ45

solid metal housing, quick-connect technology AWG 27–22

Cat 6<sub>A</sub> / Cat 5e




### Dimensions



### Connection assignment


#### 490174

T568B




#### 490175, 490176

T568A



#### 490177


Profinet



Description		Part-No.		Type	PU
Description	Connection according to TIA 568 B	490174	S*	RJ45-M 8pol. Cat.6A T568B	1
	Connection according to TIA 568 A	490175	S*	RJ45-M 8pol. Cat.6A T568A	1
	Connection according to TIA 568 B	490176	S*	RJ45-M 8pol. Cat.6A T568B	1
	Connecting according to color coded Profinet.	490177	S*	RJ45-MS 4pol. PROFINET	1

Technical data	490174	490175	490176	490177
Rated voltage			30 V	
Rated current			≤1 A per contact	
Pole number		8		4
Transfer rate		10 Gbit/s		100 Mbit/s
Category		Cat.6 <sub>A</sub>		Cat.5e
Shielding			shielded	
<b>General</b>				
Design			RJ45	
Degree of pollution			1	
Insulation resistance			> 500 MΩ	
Contact resistance			< 20 mΩ	
Flamability according to UL 94			V0	
Protection class			IP20	
Housing material			Zinc die-casting	
Color of the housing			silver	
Cover			PBT black	
Contact material			Spring steel gold-plated	
Strand diameter			1 – 1.6 mm	
Cable diameter			5.5 – 10 mm	
Cross-section AWG		AWG 24/1-22/1, AWG 27/7-22/7, AWG 24/19-22/19	AWG 26/1-24/1, AWG 27/7-24/7, AWG 26/19	AWG 24/1-22/1, AWG 27/7-22/7, AWG 24/19-22/19
Operation temperature range			-40 °C ... +85 °C	
Storage temperature range			-40 °C ... +85 °C	
Mechanical service life			>750 insertion cycles	
Dimensions (w × h × d)			13.9 × 16.3 × 53.8 mm	
Weight (kg/piece)			0.025	
Approvals			cULus (E326112)	
Standards			IEC 60603-7-51	IEC 61784-5-3
<b>Comments</b>				
Suitable for Profinet, SERCOS3, Ethercat, Ethernet/IP, Powerlink, VARAN, Power over Ethernet+ (PoE+IEEE 802.3at)				
Suitable cables, see overview assignment Ethernet cables to connectors				

### Mounting diagram

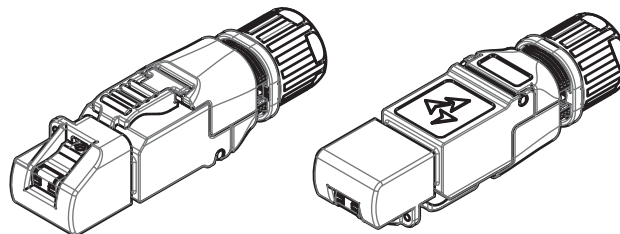

\* S Article from stock  
A Available with a lead time  
R Available on request

# Actuator sensor interface · RJ45 connector




## Industrial connector RJ45

solid metal housing, quick-connect technology AWG 27–22

Cat 6<sub>A</sub>




### Dimensions



### Connection assignment


490128

T568B



490129, 490138

T568A



Description		Part-No.		Type	PU
Description	Connection according to TIA 568 B	490128	S*	RJ45-M 8pol. Cat.6A T568B	1
	Connection according to TIA 568 A	490129	S*	RJ45-M 8pol. Cat.6A T568A	1
	Connection according to TIA 568 B	490138	S*	RJ45-M 8pol. Cat.6A T568B AWG 26/19	1
Technical data		490128		490129	490138
Rated voltage				30 V	
Rated current				≤1 A	
Pole number				8	
Transfer rate				10 Gbit/s	
Category				Cat.6 <sub>A</sub>	
Shielding				shielded	
General					
Design				RJ45	
Degree of pollution				1	
Insulation resistance				> 500 MΩ	
Contact resistance				< 20 mΩ	
Flamability according to UL 94				V0	
Protection class				IP20	
Housing material				Zinc die-casting	
Color of the housing				black	
Cover				PBT black	
Contact material				Spring steel gold-plated	
Strand diameter		0.85 – 1.6 mm			0.85 – 1.1 mm
Cable diameter				5 – 9 mm	
Cross-section AWG		AWG 24/1-22/1, AWG 27/7-22/7			AWG 26/1, AWG 26/7, AWG 26/19
Operation temperature range		-40 °C ... +70 °C			
Storage temperature range		-40 °C ... +70 °C			
Mechanical service life		>750 insertion cycles			
Dimensions (w × h × d)		13.8 × 16.2 × 53.1 mm			
Weight (kg/piece)		0.025			
Approvals		cULus (E326112)			
Standards		IEC 60603-7-51			

### Comments



Suitable for Profinet, SERCOS3, Ethercat, Ethernet/IP, Powerlink, VARAN, Power over Ethernet+ (PoE+IEEE 802.3at)  
Suitable cables, see overview assignment Ethernet cables to connectors

# Actuator sensor interface · RJ45 connector

Industrial connector RJ45, angled  
solid metal housing, quick-connect technology AWG 27–22  
Cat 6<sub>A</sub> / Cat 5e




## Dimensions



## Connection assignment


### 490151

T568B




### 490152, 490153

T568A




### 490178



Description	Part-No.	Type	PU
Description	490151 S*	RJ45-X 8pol. Cat.6A T568B	1
	490152 S*	RJ45-X 8pol. Cat.6A T568A	1
	490153 S*	RJ45-X 8pol. Cat.6A T568B AWG 26/19	1
	490178 S*	RJ45-MR 4pol. PROFINET	1

Technical data	490151	490152	490153	490178
Rated voltage		30 V		
Rated current		≤1 A per contact		
Pole number		8		4
Transfer rate		10 Gbit/s		100 Mbit/s
Category		Cat.6 <sub>A</sub>		Cat.5e
Shielding		shielded		
<b>General</b>				
Design		RJ45 angle connector		
Degree of pollution		1		
Insulation resistance		> 500 MΩ		
Contact resistance		< 20 mΩ		
Flamability according to UL 94		V0		
Protection class		IP20		
Housing material		Zinc die-casting		
Color of the housing		silver		
Cover		PBT black		
Contact material		Spring steel gold-plated		
Strand diameter	1 – 1.6 mm	0.85 – 1.1 mm	1 – 1.6 mm	
Cable diameter		5.5 – 10 mm		
Cross-section AWG	AWG 24/1-22/1, AWG 27/7-22/7	AWG 26/1-24/1, AWG 27/7-24/7, AWG 26/19	AWG 24/1-22/1, AWG 27/7-22/7, AWG 24/19-22/19	
Operation temperature range		-40 °C ... +85 °C		
Storage temperature range		-40 °C ... +85 °C		
Mechanical service life		>750 insertion cycles		
Dimensions (w × h × d)		13.9 × 38.0 × 45.7 mm		
Weight (kg/piece)		0.030		0.025
Approvals		cULus (E326112)		
Standards		IEC 60603-7-51		IEC 61784-5-3
<b>Comments</b>				
Suitable for Profinet, SERCOS3, Ethercat, Ethernet/IP, Powerlink, VARAN, Power over Ethernet+ (PoE+IEEE 802.3at)				
Suitable cables, see overview assignment Ethernet cables to connectors				

## Mounting diagram

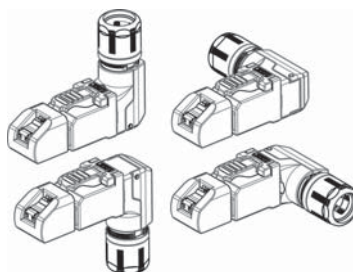


# Interface Technology · Ethernet connectivity

## Module holder, RJ45, female / IDC For TS35 DIN rail Cat. 6<sub>A</sub>



### Dimensions



### Connection assignment RJ45

	TIA 568A	TIA 568 B	Profinet
1	WHGN	WHOG	YE
2	GN	OG	OG
3	WHOG	WHGN	WH
4	BU	BU	-
5	WHBU	WHBU	-
6	OG	GN	BU
7	WHBR	WHBR	-
8	BR	BR	-


Description	Part-No.	Type	PU
Suitable for Ethernet applications			
Description	8-pin	490166 S* MDT-RJ45 F 8pol. Cat.6A	1
Technical data		490166	
Rated voltage		125	
Rated current		≤1.5 A per contact	
Pole number		8	
Transfer rate		10 Gbit/s	
Category		Cat.6	
Contact type		IDC	
Shielding		shielded	
General			
Design		RJ45 female	
Nominal insulation voltage		– V	
Test voltage		– V	
Degree of pollution		1	
Insulation resistance		> 100 MΩ	
Contact resistance		< 50 mΩ	
Flamability according to UL 94		V0	
Protection class		IP20	
Housing material		PC	
Color of the housing		grey	
Contact material		CuSn, gold-plated	
Cable diameter		4.5 – 8 mm	
Cross-section AWG		AWG 24-22	
Operation temperature range		–40 °C ... +70 °C	
Storage temperature range		–40 °C ... +70 °C	
Mechanical service life		>750 insertion cycles	
Dimensions (w × h × d)		18.0 × 70.5 × 67.5 mm	
Weight (kg/piece)		0.063	
Approvals		cULus (E326112)	
Standards		–	
Accessories	Part-No.	Type	PU
Patch cable RJ45 Cat.5e	192000.xxxx	xxxx cable length from 0.5 - 30 m	1
Patch cable RJ45 Cat.6	192100.xxxx	xxxx cable length from 0.5 - 30 m	1

# Actuator sensor interface · M12 - connector


Field wireable connector, M12 straight, shielded  
Male / female D-coded (Ethernet, Profinet, Sercos)  
Spring terminal: Push-in connection technology



## Dimensions




## Pin layout D-cod.




Description	Part-No.	Type	PU
Male			
Coding	D	490212 S*	STGK4-M12 (C)-D FK
Female			
Coding	D	490213 S*	KUGK4-M12 (C)-D FK
Technical data	Male	Female	
Part-No.	490212	490213	
Rated voltage U <sub>N</sub>	AC/DC 24 V		
Rated voltage max.	60 V		
Rated current	4 A		
Pole number	4		
Status indication	–		
Current Consumption	– mA		
Coding	D		
Shielding	–		
General			
Connection device	Spring terminal Push-In		
Design	M 12×1 male straight	M 12×1 female straight	
Rated insulation voltage (EN 50178)	–		
Test voltage	1500 V		
Degree of polution	3		
Insulation resistance	> 100 MΩ		
Contact resistance	< 5 mΩ		
Flamability according to UL 94	V0		
Protection class	IP65, IP67 in screwed condition		
Housing material	Zinc die-casting, nickel-plated		
Color of the housing	silver		
Contact material	CuSn, gold-plated		
Material knurled nut	Zinc die-casting, nickel-plated		
Material sealing ring	NBR		
Cross-section, metric	without AE: 0.14–0.75 mm <sup>2</sup> with AE: 0.14–0.5 mm <sup>2</sup>		
Cross-section AWG	without AE: AWG26–AWG18 with AE: AWG 28–AWG20		
Cable diameter	4 – 8 mm		
Tightening torque	M12-knurled nut: 0.4 Nm sleeve housing: 0.8 Nm pressure nut: 3 Nm		
Storage temperature range	40 °C ... +85 °C		
Temperature range connector	40 °C ... +85 °C		
Mechanical service life	>100 insertion cycles		
Weight (kg/piece)	0.037	0.042	
Approvals	–		
Standards	IEC 61076-2-101, EN 50155 (2001) vibration and shock		

## Mounting diagram



## Mounting diagram







# Actuator sensor interface · M12 - connector


Field wireable connector, M12 straight, shielded  
Male / female D-coded (Ethernet, Profinet, Sercos)  
Spring terminal: Push-in connection technology



## Dimensions

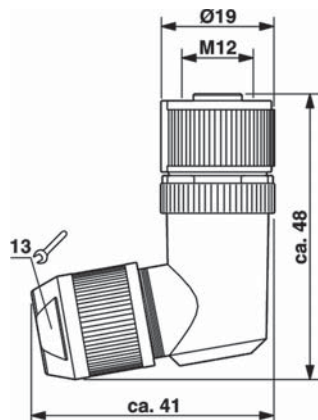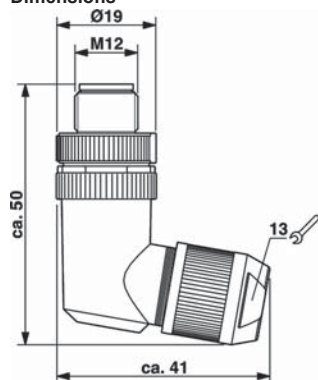


## Pin layout D-cod.




Description		Part-No.	Type	PU	
Male					
Pole number	4	490214	S*	STWK4-M12 (C)-D FK	1
Female					
Pole number	4	490215	S*	KUWK4-M12 (C)-D FK	1
Technical data		Male	Female		
Part-No.		490214	490215		
Rated voltage U <sub>N</sub>			AC/DC 24 V		
Rated voltage max.			60 V		
Rated current			4 A		
Pole number			4		
Cable length			– m		
Status indication			–		
Stromaufnahme pro LED			– mA		
Coding			D		
Shielding			–		
General					
Connection device	Spring terminal Push-In				
Design	M 12×1 male angle connector		M 12×1 female angle connector		
Rated insulation voltage (EN 50178)	–				
Mounting	Coding can be rotated in the 45° increments				
Test voltage	1500 V				
Degree of polution	3				
Insulation resistance	> 100 MΩ				
Contact resistance	< 5 mΩ				
Flamability according to UL 94	V0				
Protection class	IP65, IP67 in screwed condition				
Housing material	Zinc die-casting, nickel-plated				
Color of the housing	silver				
Contact material	CuSn, gold-plated				
Material knurled nut	Zinc die-casting, nickel-plated				
Material sealing ring	NBR				
Cross-section, metric	without AE: 0.14–0.75 mm <sup>2</sup> with AE: 0.14–0.5 mm <sup>2</sup>				
Cross-section AWG	without AE: AWG26–AWG18 with AE: AWG 28–AWG20				
Cable diameter	4 – 8 mm				
Tightening torque	M12-knurled nut: 0.4 Nm sleeve housing: 0.8 Nm pressure nut: 3 Nm				
Storage temperature range	40 °C ... +85 °C				
Temperature range connector	40 °C ... +85 °C				
Mechanical service life	>100 insertion cycles				
Weight (kg/piece)	0.039		0.044		
Approvals	–				
Standards	IEC 61076-2-101, EN 50155 (2001) vibration and shock				

## Mounting diagram



## Mounting diagram





# Actuator sensor interface · M12 - connector


Field wireable connector, M12 straight shielded  
Male - X coded Cat 6<sub>A</sub> (Ethernet, Profinet)  
IDC/quick-connect technology



## Dimensions




## Pin layout



Description	Part-No.	Type	PU
Male			
Pole number	8	490167 S*	STGK8-M12(C) 8pol. X-kod. Cat.6A 1
Technical data			
		Male	
Rated voltage U <sub>N</sub>	DC 50 V		
Rated current	0.6 A		
Pole number	8		
Coding	X		
Shielding	360°		
General			
Design	M 12×1		
Degree of polution	3		
Insulation resistance	> 100 MΩ		
Flamability according to UL 94	V0		
Contact resistance	≤5 mΩ		
Protection class	IP65/67		
Housing material	Zinc die-casting		
Contact material	CuSn, gold-plated		
Material sealing ring	NBR		
Strand diameter	0.9 – 1.6 mm		
Cable diameter	0.9 – 1.6 mm		
Storage temperature range	-40 °C ... +85 °C		
Temperature range connector	-40 °C ... +85 °C		
Connection device	Compliant terminal		
Cross-section AWG	AWG 26-22		
Mechanical service life	>100 insertion cycles		
Weight (kg/piece)	0.043		

Accessories	Part-No.	Type	Jacket material
matching cables	104338	EL BUS(C)PVC	PVC
		ET(4×(2×AWG26/7)St)C	
	104331	EL ET BUS(C)PVC PIMF (4×(2×AWG26/7)) GN	PVC
	104347	SU BUS(C)P	PUR
		ET(4×2×AWG26/19)C UL	
		Cat.6	

## Mounting diagram




\* S Article from stock  
A Available with a lead time  
R Available on request

# Actuator sensor interface

## Field wireable connector, M12 straight shielded Female - X coded Cat 6<sub>A</sub> (Ethernet, Profinet) IDC/quick-connect technology




Pin layout



Description	Part-No.	Type	PU
Pole number	8	490168 S*	KUGK8-M12(C) 8pol. X-kod. Cat.6A 1
Technical data	—		
Rated voltage U <sub>N</sub>	DC 50 V		
Rated current	0.6 A		
Pole number	8		
Coding	X		
Shielding	360°		
General			
Design	M 12×1		
Degree of pollution	3		
Insulation resistance	> 100 MΩ		
Flamability according to UL 94	V0		
Contact resistance	—		
Protection class	IP65/67		
Housing material	Zinc die-casting		
Contact material	CuSn, gold-plated		
Material sealing ring	NBR		
Strand diameter			
Cable diameter	5 – 9.7 mm		
Storage temperature range			
Temperature range connector	-40 °C ... +85 °C		
Connection device	Compliant terminal		
Cross-section AWG	AWG 26-22		
Mechanical service life	>100 insertion cycles		
Weight (kg/piece)	0.022		

Mounting diagram




# Actuator sensor interface · RJ45 panel connector

**RJ45 panel connector for front installation 22.5 mm**  
**female/female 1:1**  
**Cat 5e/6**




## Dimensions




## Circuit diagram


### 492075




### 491075



## Mounting diagram



front view:



Description		Part-No.	Type	PU
Category				
Category	Cat.5e	492075 S*	RJ45 F/F 8/8 Cat.5e	1
	Cat.6	491075 S*	RJ45 F/F 8/8 Cat.6	1

Technical data	492075	491075
Rated voltage $U_N$	AC 24 V	
Rated voltage max.	50 V	150 V
Rated current		1.5 A
Pole number		8
Cable length		– m
Transfer rate	100 MHz	250 MHz
Category	Cat.5e	Cat.6
Contact type		1 : 1
Shielding	connected through	360°
Coding		–
<b>General</b>		
Design		RJ45
Test voltage		– V
Degree of pollution		3
Insulation resistance		> 100 MΩ
Contact resistance		< 30 mΩ
Flamability according to UL 94		V0
Protection class		IP65 IP20
Housing material		PA PBT
Cover		TPU
Contact material		CuSn, gold-plated
Mounting		Front installation
Installation depth		70 mm
Number of conductors/cross-section		8×2
Jacket material		–
Cable diameter		– mm
Bending radius		–
Operation temperature range		–25 °C ... +70 °C
Storage temperature range		–25 °C ... +80 °C
Mechanical service life		>750 insertion cycles
Dimensions (Ø×d)		29.5 × 29 mm
Weight (kg/piece)		0.016
Approvals		cULus (E326112)

# Actuator sensor interface · RJ45 panel connector


## Control cabinet bushing M12 - RJ45

female/female 1:1


Cat 5e (Ethernet, Profinet)




### Dimensions



### Circuit diagram



### Mounting diagram



Description	Part-No.	Type	PU
Design	490105 S*	M12-RJ45 F/F 90° 4/4 Cat.5e Profinet	1
	490106 S*	M12-RJ45 F/F 180° 4/4 Cat.5e Profinet	1
<b>Technical data</b>			
	<b>490105</b>	<b>490106</b>	
Rated voltage $U_N$		24 V	
Rated voltage max.		50 V	
Rated current		1 A	
Pole number		4	
Cable length		– m	
Transfer rate		0.1 Gbit/s	
Category		Cat.5e	
Contact type		1 : 1	
Shielding		360°	
Coding		D	
<b>General</b>			
Design		RJ45/M 12×1	
Test voltage		– V	
Degree of pollution		–	
Insulation resistance		> 100 MΩ	
Contact resistance		< 30 mΩ	
Flamability according to UL 94		V0	
Protection class		IP67	
Housing material		PA	
Cover		–	
Contact material		Phosphor Bronze, gold-plated	
Mounting		–	
Installation depth		70 mm	
Number of conductors/cross-section		–	
Jacket material		–	
Cable diameter		– mm	
Bending radius		–	
Operation temperature range		–25 °C ... +85 °C	
Storage temperature range		–25 °C ... +85 °C	
Mechanical service life		>750 insertion cycles	
Dimensions (Ø×d)		29.5 × 29 mm	
Weight (kg/piece)		0.037	
Approvals		–	



# Notes

---




































# Product Overview: Classification Ethernet
































## Ethernet cables

Art.no	Description	C-track compatible	Cat	Iso.													
					490128 - 490174 - 490151 AWG 27 - 22	490129 - 490175 - 490152 AWG 27 - 22	490138 - 490176 - 490153 AWG 26	490177 - 490178 - AWG 27 - 22	490166 AWG 24 - 22	490212 - 490215 AWG 28 - 20	490167 - 490168 AWG 26 - 22		PROFI NET	ETHERNET POWERLINK Standardization Group	SERCOS the automation bus	CC-Link IE Field	EtherNet/IP
104301	Prof. (2X2XAWG22/1) UL		Type A	PVC				•	•	•			•	•	•		
104302	Prof. (2X2XAWG22/19) UL	•	Type C	PUR				•	•	•			•	•	•		
104303	Prof. (2X2XAWG22/7) UL	•	Type C	PUR				•	•	•			•	•	•		
104307	Prof. (2X2XAWG22/7) UL		Type B	PVC				•	•	•			•	•	•		
104331	Eth. (4X(2XAWG26/7) UL		7	PVC			•			•							•
104335	Eth. (4X2XAWG26/7) UL		5e	PVC			•										•
104336	Eth. (4X2XAWG24/7) UL		5e	PVC	•	•			•							•	•
104337	Eth. (4X2XAWG24/19) UL	•	5e	PUR	•	•			•							•	•
104338	Eth. (4X(2XAWG26/7) UL		6A	PVC			•		•	•							•
104347	Eth. (4X2XAWG26/19) UL	•	6	PUR			•		•	•							•
104350	Eth. (4X2XAWG22/7) UL		5e	PVC	•	•			•								•
104379	Prof. (2X2XAWG26/19) UL	•	5e	PUR			•			•			•	•	•		
104396	Eth. (4X2XAWG26/19) UL	•	5e	PUR			•										•
104397	Eth. (4X(2XAWG22/1) UL		6A	PVC	•	•			•	•			•			•	•
104401	Eth. (4X(2XAWG24/7) UL	•	6A	PUR	•	•			•	•			•				•

# t Cable and connector

## Ethernet connector RJ45 / M12

RJ45 T568B			RJ45 T568A			RJ45 T568B AWG26		
								
490128 with cable clamp	490174 with cable fitting	490151 with cable fitting	490129 with cable clamp	490175 with cable fitting	490152 with cable fitting	490138 with cable clamp	490176 with cable fitting	490153 with cable fitting
1 white / orange			1 white / green			1 white / orange		
2 orange			2 green			2 orange		
3 white / green			3 white / orange			3 white / green		
4 blue			4 blue			4 blue		
5 white / blue			5 white / blue			5 white / blue		
6 green			6 orange			6 green		
7 white / brown			7 white / brown			7 white / brown		
8 brown			8 brown			8 brown		

RJ45 T568A/B		M12	Profinet RJ45						
									
490166 Module holder		490212 D-cod. pin	490214 D-cod. pin	490213 D-cod. female	490215 D-cod. female	490167 X-cod. pin	490168 X-cod. female	490177 straight	490178 angled
T568A	T568B								
1		1 yellow				1 white/orange		1 yellow	
2		2 white				2 orange		2 orange	
3		3 orange				3 white / green		3 white	
4		4 blue				4 green		4	
5						5 white / brown		5	
6						6 brown		6 blue	
7						7 white / blue		7	
8						8 blue		8	

# LÜTZE - Ethernet Connectivity • Glossary

**AC Access Client** Radio-supported communication unit that has to log onto the Access Point (→ AP). Only after successful authentication is it possible for the Access Client to transmit data to the network, or to receive data from the network. (→ Wireless LAN)

**Access Protocol** Access procedure. Governs access to the medium. Ethernet: CSMA/CD; Token Ring: Token FDDI; Append Token; WLAN: CSMA/CA

**Access procedure** → Access Protocol.

**ACK** Acknowledge Designates a positive confirmation of receipt. ACK is part of the communication protocol and is responsible for the confirmation of receipt of the transmission.

**ACR** attenuation to crosstalk ratio; corresponds to a signal-to-disturbance signal distance for interference from other pairs. Is determined by simple subtraction of the dB values

**ADSL** Asymmetric Digital Subscriber Line. Long-distance access

**AES** Advanced Encryption Standard. Encryption standard with 128-, 192- and 256-bit encryption. This symmetrical encryption is intended to replace the previous DES standard.

**Aging** Process (algorithm) for updating data, especially address memory. After a time elapses, an address is marked as "old" and deleted in the next pass, if it is not detected at a port before that.

**AP** Access Point. In wireless networks the Access Point is the → bridge to the wire-bound networks. It can be connected directly to Ethernet, Token Ring or ATM. The access point is connected with all of the network accounts ("access clients"), and performs central functions such as roaming or security. (→ Wireless LAN)

**API** Application Programming Interface

**ARP** Address Resolution Protocol requests the associated MAC address via the IP address. → RARP

**ARS** Automatic Rate Selection. Independent selection of the transmission speed by the access point (→ AP) depending on the connection quality (distance).

**ASN** 1 Abstract Syntax Notation One. Programming language of the → MIB.

**ATM** Asynchronous Transfer Mode. Based on cells of 53 bytes. Suitable for telephone, video and other data transmission. Is primarily used in WAN applications.

**AUI** Attachment Unit Interface. Interface for physical isolation of transceivers from Ethernet controllers (cable up to a max. of 50 m)

**Autocrossing** A function that allow automatic crossing of the transmission and reception conductors at twisted pair interfaces. Switches that support this function can be connected to each other via a 1:1 wired cable instead of a crossover cable.

**Autonegotiation** Detects on the port the transmission parameters of the connected device, such as speed, duplex mode and flow control, and automatically adjusts itself to the optimal values.

**Autopolarity** A function of devices with a 10 BASE-T or 100 BASE-TX interface for automatic correction of wiring errors in twisted pair cables, which leads to a polarity reversal of the data signals.

**Autosensing** A function that allows a device to automatically detect the data rate (10 Mbit/s or 100 Mbit/s, 1 Gbit/s), and to transmit and receive using this data rate.

**Backpressure** Simulates a collision in HDX mode by generating a jam signal. → Flow-Control

**Bandwidth** Amount of data that can be transferred in one second. For a single connection this is the same as the speed.

**Bandwidth-length product** Used to estimate what distance a multimode fibre supports with a certain data rate (speed). The gross rate must be used here.

**BFOC** Bayonet Fiber Optical Connector. Also known as an ST Connector (AT&T brand). Fibre-optic connector with bayonet connector. The only standardised connector for 10 Mbit/s Ethernet. Available for multimode and single mode glass fibres and also for → POF.

**BGNW** The BGNW (Benutzergruppe Netzwerke / Network User Group) is a manufacturer-neutral, independent interest group for leading international users and manufacturers of Network systems. The goal of the association is to promote its participants and to facilitate the exchange of information among them, as well as developing recommendations for the planning, installation, and operation of networks.

**BGP** Border Gateway Protocol. Routing protocol in the → WAN.

**BLP** → Bandwidth Length Product

**BNC** Bayonet Neill-Concelman. Connector for connection of 10 Base2 coax cables to a → MAU.

**BOOTP** Bootstrap Protocol. Supplies the statically assigned IP address for

an assigned MAC address. In comparison to → RARP rootbar.

**Bridge** → Switch

Broadcast data packet that is address to everyone in a network. Hubs and switches are transparent for broadcasts. Only routers limit a broadcast, if necessary. → Multicast and Unicast.

**BT** Bit Time, duration of a bit.

**CCITT** Comité Consultatif International Téléphonique et Télégraphique.

Now → ITU-T

**CC-Link** - Control and Communication Link, Industrial automation network based on Ethernet

**CCK** Complementary Code Keying. CCK is used in the 11 Mbit/s-version of the 802.11 LAN (80211b), and can pack a number of bits in a single symbol. This allow a higher transmission rate.

**CD** Collision Detect.

**CHAP** Challenge Handshake Authentication Protocol. PPP authentication method. Passwords are transmitted with a random number. Comparison → PAP

**Cheapernet** coax cable according to Ethernet partial standard 10BASE2. Synonyms: ThinWire, RG58.

**CoS** Class of Service. A network with class of service makes it possible to transfer data with minimal delay in an environment in which a network is shared by many users, CoS classifies the data data traffic into categories such a high, medium and low (gold, silver and bronze)

**CRC** Cyclic Redundancy Check. Error check mechanism in which the recipient performs a polynomial calculation. The result is compared with a value saved in the frame that is determined by the transmitter using the same procedure. See also FCS.

**CSMA/CD** Carrier Sense Multiple Access Collision Detect. Access procedure for Ethernet. A station that wants to transmit listens whether the network is free (carrier sense). After that it begins to transmit, and at the same time check whether other stations have also begun to transmit (multiple access), which could lead to collisions (collision detection). The collision is detected by the station and they cancel the transmission. They start a new transmission attempt after a time determined by a random generator.

**Cut-Through** Switching method in which a packet is forwarded as soon as the target address is recognised. This means that the latency is short, but faulty packets are still forwarded. This is also known as "on-the-fly packet switching". Also see Store & Forward.

**DA** See Destination address.

Attenuation Ratio of power fed to power received on a transmission line, both for copper cables and for fibre-optic cables. Specified in dB per unit of length

**DBPSK** Differential Binary Phase Shift Keying. DBPSK is a modulation process for systems with 1 Mbit/s that is used with the → DSSS transmission process according to the 802.11 standard.

**DCE** Data Communication Equipment, e.g. printers, modems. → DTE

**DES** Data Encryption Standard. Systematic encryption algorithm. The same secret key is used for encryption and decryption; i.e. all instances that have to be able to encrypt and decrypt have to know the key. DES encodes with a 56-bit key. 3DES increases the security of the normal DES method by encrypting the data with a key that is three times longer (168 bits).

**Destination Address** Destination address in Ethernet, IP, etc. "Address on the data packet"

**DeviceNet** DeviceNet is a low cost industrial network that uses CAN technology. It links industrial components such as limit switches, valves, motor switches and drives with a PLC or a PC.

**DHCP** Dynamic Host Configuration Protocol. On request informs a device as to its IP address, which is fixed via the associated MAC address, or is assigned dynamically.

**Dispersion** - Signal spreading through propagation time differences, especially in optical fibres: Mode dispersion in multimode, chromatic dispersion in single mode)

**DNS** Domain Name System. Resets host name in IP addresses per DNS server or statically per "hosts" file.

**Domain** Broadcast domain: Network area that is only limited by routers, i.e. within which a broadcast can propagate freely. → Collisions domain: Network area that is delimited by switches or routers, and in which collisions can propagate freely.

**DQPSK** Differential Quaternary Phase Shift Keying. DQPSK is a modulation process for systems with 1 Mbit/s or 2 Mbit/s, which is used with the DSSS transmission process, standard 802.11.

**DSC** Duplex straight connector. See also SC.

**DSL** Digital Subscriber Line. Technology to operate the Internet with 1.5 Mbit/s over copper cables.

# LÜTZE - Ethernet Connectivity • Glossary

**DSSS** Direct Sequence Spread Spectrum. DSSS is a transmission method according to standard 802.11. By means of encoding, this method converts the narrowband signal into a broadband signal. In this way it is possible to use the entire frequency band, thus achieving a higher data transmission rate and lower susceptibility to interference.

**DTE** Data Terminal Equipment, e.g. computers. See also difference from **DCE** Pin assignment.

**Dual Homing Network technology** in which a device is linked to a network via two independent points of attachment. One point of attachment is the primary connection, while the other is standby connection that is activated if the primary connection fails.

**DVMRP** Distance Vector Multicast Routing Protocol: Internetwork gateway protocol, largely based on RIP. DVMRP uses IGMP to exchange routing datagrams with its neighbours.

**DWDM** Dense Wavelength Division Multiplex.

**Dynamic DNS:** Assigns the same name when there is a changing IP address.

**EMC** - electromagnetic compatibility

Electromagnetic compatibility. Interference immunity and emissions behaviour with regard to electromagnetic interference, Class A/B.

**EtherCat:** Industrial Ethernet system from the company Beckhoff

**Ethernet Data network**, standardised in IEEE 802.3 since 1983. Based on the access procedure --> CSMA/C. Variable packet length from 64 bytes to 1518 bytes (1522 with TAG field). Speeds/bandwidth: 10 Mbit/s, 100 Mbit/s (Fast Ethernet), 1000 Mbit/s (Gigabit Ethernet) and 10000 Mbit/s (10-gigabit Ethernet).

**EtherNet/IP** is a protocol stack for Ethernet that has been developed for industrial applications. EtherNet/IP is based on the standard TCP/IP protocol, and uses a common application layer with DeviceNet. It thus makes it easier to exchange information between device level networks and information systems at the plant level.

Industrial Ethernet system of the --> ODVA

**ETHERNET** Packet Designation for a data packet. Besides the actual user data, it also contains the destination and source address fields (DA and SA), the TAG field (4 bytes, optional) and the Length/Type field.

**FCS** Frame Check Sequence. Checksum at the end of an Ethernet packet; is calculated and entered by the sender. The recipient calculates the checksum based on the received packet and compares it with the entered value. See also CRC.

**FDB** Forwarding Data Base. Address table of a switch that it uses to decide what port a packet has to be sent to. In the address table, a MAC address is assigned to the port that is used to reach the corresponding device. The table is updated regularly (--> Aging).

**FDDI** Fiber Distributed Data Interface. Data network, standardised in ISO 9314, ANSI X3T9.5 and X3T1 2.

**FDX** Full Duplex. Transmission mode of a component: simultaneous transmitting and receiving is possible. No access procedure necessary. See also HDX.

**FEXT** Far End Crosstalk: Crosstalk at the far end in symmetrical copper cables.

**Flame-retardant** - Characteristic of a cable not to spread a flame (wicking effect) and/or to extinguish it.

**Flow-Control Strategy** in case of overload at the output port and the start of a memory overflow: discarding of packets at the input port or signalling to connected devices that they should stop transmitting by simulating a collision in HDX mode or by transmitting special "Pause" packets in FDX mode.

**F/O** Fiber optics.

Frame Relay Modified version of X.25 packet switching in a WAN.

**FTP** - Foiled Twisted Pair, foil-shielded symmetrical data cable

**FTP 1.** File Transfer Protocol. Protocol on Layer 5, uses TCP for transfer, therefore used in WANs. 2. Foiled Twisted Pair.

**FTTD** Fiber To The Desk Office wiring with fibre-optic cables as far as the end node

**Full Duplex** --> FDX

**GARE** Generic Attribute Registration Protocol. Protocol family for exchanging parameters between switches on Layer 2, at present there exist --> GMRP and --> GVRP.

**Gateway Component** above Layer 2 of the ISO/OSI Reference Model. On Layer 3 usually called a router. Converts protocols of these layers into each other.

**GBIC** Gigabit interface converter. See under SFP.

**Gbps** Gigabits per second, Gbit/s.

**GMRP** --> GARP Multicast Registration Protocol.

**GVRP** --> GARP VLAN Registration Protocol.

**Half Duplex** --> HDX

**Halogen-free:** In the event of a fire, halogen-free cables do not form any acidic fumes, which are very dangerous for both people and electronic devices

**HASH** Checksum that ensures the integrity of information.

**HCS**® Hard Polymer Clad Silica. Plastic fibre with a core of fused quartz. --> PCF --> POF.

**HDX** Half Duplex. Transmission mode of a component: Either transmitting or receiving is possible. In Ethernet, the access procedure CSMA/CD is required for this. --> FDX.

**HiRRP** Protocol for controlling redundant routers. If one of the two routers fails, then within 800 ms the remaining router completely assumes the tasks of the other one.

**Hops** Maximum number of router steps possible for a data packet. See also TTL.

**HSRP** Hot Standby Routing Protocol. Protocol for controlling redundant routers. See also VRRP.

**HTML** Hypertext Markup Language.

**HTTP** Hypertext Transfer Protocol. Protocol used by web browsers and web servers for transmitting data, such as text and images.

**HTTPS** --> HTTP Secure. HTTP communication encrypted in packets.

**Hub** Component on Layer 1 of the ISO/OSI Reference Model.

Regenerates the amplitude and the signal shape of the incoming signal and forwards it to all of the other ports. Synonyms: Star coupler, concentrator.

**IAONA** (Industrial Automation Open Networking Alliance Europe e.V) Europe was founded in 1999 at the SPS/IPC/Drives trade fair Nuremberg. IAONA is an association that now includes more than 130 leading international manufacturers and users of automation systems. The association's goal is to establish Ethernet on the international level as the standard application in all industrial environments. The purpose of this is to bring about uniform, interface-free communication through all levels of a company. This relates to all areas of factory, process and building automation. For further information: <http://www.iaona-eu.com/>

**ICMP** Internet Control Message Protocol. Best-known command: Ping.

**ID** Identifier.

**IDA** Interface for Distributed Automation. Open interface based on the TCP/IP stack, for automation applications.

**IEC** International Electrotechnical Commission. international standardisation body

**IEEE** Institute of Electrical and Electronics Engineers. Standardisation body for LANs with the important standards 802.3 for Ethernet, 802.1 for switches.

**IETF** Internet Engineering Task Force.

**IFG** Inter Frame Gap. Minimum gap between two packets. Synonym: Inter Packet Gap (IPG).

**IGMP** Internet Group Management Protocol. Layer 3 protocol for multicast transport, see also GMRP.

**IGMP Snooping** Internet Group Management Protocol Snooping. A function in which the switches examine IGMP packets and assign the membership of a node to a multicast group to the respective port. In this manner it is possible to send multicasts specifically to those segments that contain nodes of a group.

**IGP** Interior Gateway Protocol.

**IGRP** Interior Gateway Routing Protocol. Internet Protocol see IP.

**IP** Internet Protocol. Transmission protocol on Layer 3, widely used (> 80%).

IPv4: Vers. 4=4-byte addresses; IPv6: Vers. 6=16-byte addresses, IPnG=IPv6

**IP** address Logical address, assigned by the network operator. Address format (v4): 4 bytes in decimal code, separated by dots, e.g. 192.178.2.1. See also net mask.

**IPnG** IP next generation. Transmission protocol, see IP.

**IPsec** IP Security. Standard that makes it possible to ensure the authenticity of the sender, confidentiality and the integrity of data in IP datagrams by means of encryption. With IPsec a --> VPN can be set up on Layer 3. For encryption IPsec uses --> 3DES, for example.

**IPv4** IP Version 4. Transmission protocol, see IP.

**IPv6** IP Version 6. Transmission protocol, see IP.

**IPX** Internet Packet Exchange. Protocol stack from Novell, comparable to TCP/IP.



# LÜTZE - Ethernet Connectivity • Glossary

**ISDN** Integrated Services Digital Network. WAN transmission protocol.

**ISO** International Organization for Standardization. Global standardisation body.

**ISO/OSI** --> OSI reference model..

**ISP** Internet Service Provider.

**Jabber** In Ethernet, a faulty frame with more than 1518 bytes.

**Jitter** Time variation of the signal edge.

**Kbps** Kilobits per second, kbit/s.

**L2TP** Layer 2 Tunneling Protocol. For setting up a --> VPN tunnel on Layer 2. --> IPsec.

**LACP** Link Aggregation Control Protocol.

**LAN** Local Area Network. Local network, e.g. Ethernet, FDDI and token ring. --> WLAN.

**LAP** Link Access Protocol.

**Latency** Time difference between the receipt and forwarding of data, generally between the last bit received and the first bit sent.

**Skew** Difference in propagation delays on various pairs, extremely important in full duplex parallel operation

**Propagation Delay** Time that an electromagnetic signal requires for a particular transmission line, inverse of the signal velocity

**Link Aggregation** Combination of several ports (maximum 4) into one virtual port. Parallel connection transmission with redundancy in case of failure of a port. Standard IEEE 802.3. Colloquially also called "trunking".

**LLC** Logical Link Control. Layer 2b.

**LSB** Least Significant Bit.

**Fibre-optic cable** Optical transmission medium

**LX** Long Wavelength (Gbit Ethernet).

**MAC** Medium Access Control. MAC address, hardware address of a component in the network. The MAC address is assigned by the manufacturer. Address format: 6 bytes in hex code, separated by colons, e.g. 00:80:63:01:A2:B3

**MAN** Metropolitan Area Network. For connecting various --> LANs within a city.

**Management Administration**, configuration and monitoring of network components. The management agent of the components being managed communicates with the management station (computer) via the management protocol SNMP

**MAU** Medium Attachment Unit. --> Transceiver.

**Mbps** Megabits per second, Mbit/s

**MD5** Message Digest 5. See also Hash Algorithm.

**MDI** Medium Dependent Interface.

**MDI-X** MDI-Crossover, see also MDI.

**MIB** Management Information Base. Contains the description of the objects and functions connected in a network.

**MII** Media Independent Interface.

**Mini-GBIC** Mini gigabit interface converter. --> SFP.

**MLPPP** Multi Link PPP. --> PPP.

**Modbus TCP**, industrial Ethernet system based on the Modbus protocol

**Modes** - Propagation paths of the light in an optical fibre

**MPLS** Multiprotocol Label Switching. Layer 3 protocol.

**MSB** Most Significant Bit.

**MTBF** Mean Time Between Failure.

**MTTR** Max Time To Repair.

**Multicast** Data packet directed to a group of devices, e.g. to all Lütze devices.

**Multimode fibres** Optical fibres with relatively large core diameters. In them, the light propagates over multiple paths - multiple modes. Typical core diameters are 100µm for step index fibres, for glass fibres, 200µm for PCS/HCS® fibres and 980 µm for POF fibres. Gradient index fibres are generally made of glass, and have a typical core diameter of 50 µm or 62.5 µm. Conditionally through these --> Single mode fibre.

**NAT** Network Address Translation.

**NAT-T** NAT Traversal. Normally --> IPsec does not function if there is a --> NAT Gateway between the two IPsec end points, because the IP address of the end point is also encrypted. This problem can be circumvented using NAT-T. If supported, NAT-T is switched on automatically if necessary when establishing a connection (handshake).

**NetBEUI** NetBIOS Extended User Interface. Extended version of the NetBIOS protocol, which is used by network software such as LAN Manager, LAN Server, Windows for Workgroups and Windows NT.

**Net Mask** The net mask marks all bits of an IP address that serve to identify the network and the subnetwork. --> IP address.

## Binary depiction

IP address 10010101.11011010.00010011.01011010  
Net mask 11111111.11111111.11111111.00000000  
--> Subnetwork  
10010101.11011010.00010011.00000000

## Decimal depiction

IP address 149.218.19.90  
Net mask 255.255.255.0  
--> Subnetwork 149.218.19.0

## Available address range

Node addresses 149.218.19.1 to 149.218.19.254  
Broadcast address 149.218.19.255

**NEXT** Near End Cross Talk.

**NIC** Network Interface Card. Network interface in the computer.

**NMS** Network management system.

**Node** Node in a data network (computer, printer, hub, switch, etc.), is sometimes erroneously used with the meaning "hub" or "switch".

**NRZ** Non Return to Zero. Signal code. --> NRZI.

**NRZI** Non Return to Zero Invert. Signal code. --> NRZ.

**NVRAM** Non-Volatile RAM. Non-volatile memory.

**ODVA** Open Device Vendor Association is an organisation that promotes the worldwide use of DeviceNet and Ethernet/IP network technologies and standards in industrial automation.

**OID** Object ID.

**OLE** Object Linking and Embedding is a technology for transmitting different data between devices.

**OPC** OLE for Process Control. Protocol in process automation for standardised data exchange between Windows applications.

**OSI** Open Systems Interconnection. International standardisation programme, originated by --> ISO and --> ITU-T, in order to create standards for data networks to ensure the compatibility of devices from various manufacturers.

**OSI Model** Model describing communication in a network. The functionality of the hardware is subdivided into 7 layers. In the lowest layer (physical layer), adaptation to the medium is performed.

**OSPF** Open Shortest Path First. Protocol for the exchange of routing information between routers. Faster than --> RIP and suitable for larger networks.

**OTDR** Optical Time Domain Reflectometer Versatile optical measuring device for fibre-optic networks.

**OUI** Organizationally Unique Identifier. The first three bytes of the --> MAC address indicate the manufacturer of the components.

Packet size Frame size. Ethernet: 64 ... 1518 bytes (1522 with VLAN tag, FDDI:... 4500 bytes.

**PAP** Password Authentication Protocol. PPP authentication method.

Passwords are transmitted in unencrypted form. PAP is based on usernames.

**Parallel Detection** Subfunction of --> autonegotiation, to adjust settings for a partner that does not support autonegotiation. A port detects the speed based on FLP or NLP and sets itself to 100 Mbit/s or 10 Mbit/s accordingly. HDX is always used as the duplex mode.

**PCF** Plastic Cladding Silica Fiber. Plastic fibre with a core of fuse quartz. --> POF --> HCS®.

**PD** Powered Device. Describes the end device (e.g. an IP telephone, in the draft standard IEEE P802.3af (DTE Power via MDI). IEEE P802.3af defines how a power supply can be provided via an Ethernet twisted pair cable.

**PDU** Protocol Data Unit.

**PHY** Physical sublayer. Physical layer/components (on Level 1 b).

**PIMF** Pair in Metal Foil (data cable). --> STP.

**PLC** Programmable Logic Control. --> PLC - Programmable Logic Control.

**PMD** Physical Medium Dependent. Physical layer/components on Level 1 a.

**POE** Power over Ethernet.

**POF** Polymer Optical Fiber. Plastic optical fibre --> HCS® --> PCF.

**POL** Power over LAN.

**Port Mirroring** The data traffic of a port (In/Out) is mirrored (copied) on another port, for example to allow it to be examined with an analyzer.

**Port Trunking** --> Link Aggregation.

**PowerLink** Industrial Ethernet system from the company B&R

# LÜTZE - Ethernet Connectivity • Glossary

**PLC** Programmable Logic Controller.

**PPP** Point-to-Point Protocol. Creates router-to-router and host-to-network connections. PPP works with protocols from various level, such as IP, IPX and ARA. PPP has integrated security mechanisms such as CHAP and RAR.

**PPPoE** --> Point-to-Point-Protocol over Ethernet.

**PPS** Packets Per Second. Data packets per second

**PPTP** Point-to-Point Tunneling Protocol.

Prioritisation Data packets are given priority handling based on defined criteria. Identification on Layer 2 with inserted --> tag field, on Layer 3 in the --> TOS field of --> IP.

**Private Key** --> Private/Public Key: In asymmetrical encryption algorithms, two keys are used: one public one (public key) and one private one (private key). The public key is made available by the future recipient of data to those who will be sending the data to him. The private key is kept only by the recipient. It is used to decrypt the received data.

ProfiNet, industrial Ethernet system from Siemens

**PS** Power Supply. --> PSU.

**PSE** Power Sourcing Equipment. Describes the device supplying power (e.g. a switch) in the draft standard IEEE P802.3af (DTE Power via MDI). IEEE P802.3af defines how a power supply can be provided via an Ethernet twisted pair cable.

**PSU** Power Supply Unit. --> PS.

**PTP** Precision Time Protocol. Protocol for time synchronisation acc. to IEEE 1588, with a precision of less than 1µs.

**Public Key** --> Private/Public Key

**PUR** - Polyurethane, high-quality jacket material for cables

**PVC** - Polyvinyl chloride, economical insulation and jacket material for cables

**PVV** Path Variability Value. Specified in bit times.

**QoS** Quality of Service. Quality of the transmission, e.g. speed, bandwidth, delay, reliability or priority. In Level 2 for IEEE 802.1D implemented only for priority. --> Prioritisation.

**RADIUS** Remote Authentication Dial In User Service. A RADIUS server authenticates access for a client that logs on with its name and password. Passwords are transmitted in encrypted form.

**RAM** Random Access Memory. Volatile memory

**RARP** Reverse Address Resolution Protocol. Supplies the statically assigned IP address for an assigned MAC address. See also BOOTP and DHCP.

**RAS** Remote Access System.

**Repeater** Components for signal regeneration on Level 1. Regenerates the amplitude, signal edge and cycle. Repeaters with more than 2 ports are also called hubs.

**RFC** Request For Comments. Pseudo-standard for the Internet, protocols and applications, issued by IETF.

**RG58** Coax cable with 50 characteristic impedance, also called ThinWire or 10BASE2.

**RIP** Routing Information Protocol. For exchanging routing information between routers in a LAN. There are two versions: RIP V1 and RIP V2. --> OSPF.

**RJ45** Connector for twisted pair. Typical for --> Ethernet and --> ISDN.

**RMON** Remote Monitoring.

**Router** Components on Layer 3 of the - ISO/OSI Reference Model. Connects networks on Layer 3. By means of additional paths to the destination, provides a choice of paths depending on de

**RS 232** Recommended Standard. Serial interface, also designated V.24. Strictly speaking, the supplement to V.24 according to a CCITT.

**RSTP** Rapid Reconfiguration Spanning Tree Protocol.

**RSVP** Resource Reservation Protocol. Reserves bandwidths in a WAN

**RTCP** Realtime Transport Control Protocol. finable criteria, such as path costs.

**RTP** Real Time Protocol.

Return Loss Ratio of disruptive reflection to the transmitted signal power

**Rx** Receive (received).

**SA** Source Address

**SAN** Storage Area Network. Network for connecting servers and memory subsystems, such as hard disks, RAID and tape systems. Generally based on Fibre Channel.

**SAP 1.** Service Access Point. 2. Service Advertising Protocol.

**SC** Straight Connector. Connector --> DSC.

**SCADA** Supervision Control And Data Acquisition. Process visualisation

system for process control and visualisation. Windows-based

**Shielding attenuation** Ratio between the power of electromagnetic interference outside and inside of a shield. A measure of the effectiveness of the shielding, e.g. for cables or also connector housings.

Transfer impedance Current/voltage ratio on cable shields for assessing the shielding effect.

**Suitability for drag chains:** special cable designs have to be used for operation in energy supply chains.

Noise, broadband electromagnetic interference

**SD** Starting Delimiter.

**SDH** Synchronous Digital Hierarchy. Is related to the American SONET (Synchronous Optical Network) standard; with a basic SDH rate of 155.52 Mbit/s (STM-1) and multiples thereof.

**SERCOS III**, industrial Ethernet system based on the SERCOS interface

**SFD** Start Frame Delimiter.

**SFP** Small form-factor pluggable. A --> transceiver for 1 Gbit/s\_ networks that converts serial electric signals into optical signals and vice versa, see also GBIC.

**SHA-1** Secure Hash Algorithm 1. --> Hash.

**Single mode fibre** Fibre-optic cable in which, due to its small core diameter (max. 10 µm), the light can only propagate along one path starting with the cut-off wavelength. \_ Multimode fibre

**SLA** Service Level Agreement.

**SLIP** Serial Line Internet Protocol. Standard protocol for serial point-to-point connections, uses a serial interface (e.g. V24) for IP traffic.

**SMON** Switch Monitoring.

**SMTP** Simple Mail Transfer Protocol. Internet protocol that provides e-mail services.

**SNTP** Simple Network Time Protocol. Protocol for time synchronisation, based on NTP, with a precision of 1ms to 50ms. For higher precision, --> PTP (Precision Time Protocol acc. to IEEE 1588) is used.

**SNAP** Subnetwork Access Protocol.

**SNMP** Simple Network Management Protocol. Protocol standardised by IETF for communication between agents and the management station in network management. Used in more than 99% of LANs.

**SOHO** Small Office Home Office. Networks for small offices/branches and telecommuting workstations.

**Spanning Tree** Protocol that automatically dissolves network loops. When installed with switches, implements redundant paths for additional reliability if a connection fails. Change-over time 30 s to 60 s.

**SQE** Signal Quality Error. Signal that is sent back by a transceiver to the LAN controller (processor) in order to report that the packet was sent properly. Also called heartbeat.

**SSH** Secure Shell. Allows cryptographically secured communication over non-secure networks by means of authentication of the partners, and integrity and confidentiality of the data exchanged.

**Star coupler** Active star coupler --> Hub. A passive star coupler is a component in fibre-optic equipment with n inputs and m outputs without amplification of the signal.

**Store & Forward** Switching method in which a packet is first saved completely and only then forwarded. --> Cut-Through

**STP 1.** Shielded Twisted Pair. Cable with shielded twisted wire pairs. --> PIMF, UTP. 2. - Spanning Tree Protocol.

**Switch** Component of Layer 2 of the OSI Reference Model. Synonym: Bridge. Unlike a --> hub, forwards a packet only to the port to which the destination station is connected, which leads to switch disconnection of individual segments. Then no access procedure is required between two switches in full duplex operation. So-called Layer-3 and Layer-4 switches are now available that have also implemented sub-functions of these levels.

**Symmetry**, Symmetrical attenuation Ratio between the power of the normal-mode wave and that of the common-mode wave as a measure of the EMC properties of symmetrical copper cables (for shielded cables additionally --> shielding attenuation)

**SX** Short Wavelength (Gigabit Ethernet).

**Tag Field** Optional field in the Ethernet packet, inserted after the so

**TCO** Total Cost of Ownership.

**TCP** Transmission Control Protocol. Connection-oriented transmission protocol on Layer 4 of the TCP/IP protocol family. --> UDP.

**TCP/IP** Transmission Control Protocol/Internet Protocol. Most widely-used protocol family, from Layer 3 upwards. Standardised by --> IETF. Protocols that build upon each other:

Layer 3: IP; Layer 4: TCP, UDP; Layer 5: TFTP, SMTP, FTP, etc.

Layer 5 contains Layers 5 to 7 of the OSI model.

# LÜTZE - Ethernet Connectivity • Glossary

**Telnet** Virtual terminal program of the TCP/IP stack for remote access via network to the user interface of the serial interface.

**TFTP** Trivial File Transfer Protocol. Protocol on Layer 5, uses --> UDP for transfer, therefore used in --> LANs.

**Token Ring** Data network standardised in IEEE 802.5, but also proprietary solutions by IBM.

**TOS** Type Of Service. Field in IP packet for --> Prioritisation.

**TPE** - Thermoplastic elastomers, a category of plastics with special characteristics as an insulating and jacket material for cables

**TP** Twisted Pair. Symmetrical copper data cable.

**Transceiver Converts** data signals from AUI interfaces to another medium, e.g. twisted pair. New components have transceivers already implemented. For older components there are plug-on transceivers for multimode, twisted pair or coax.

**Trunking** --> Aggregation.

**TTL** Time To Live. Field in the IP protocol header that specifies how many hops are allowed for a packet before it is automatically deleted.

**Tx** Transmit. Transmission rate; speed of the transmission, also --> Bandwidth, Ethernet: 10, 100, 1000, 10000Mbit/s

Token Ring: 4 Mbit/s, 16 Mbit/s

FDDI: 100 Mbit/s

**UDP** User Datagram Protocol. Connectionless transport protocol on Layer 4 of the TCP/IP protocol family. --> TCP.

**Unicast** Data packet that is addressed to only one recipient, as opposed to multicast and broadcast.

**UPS** Uninterruptable Power Supply. --> USV

**URL** Universal Resource Locator. Standardised addressing scheme for access to hypertext documents and other services via a browser. Z.B. [www.luetze.de](http://www.luetze.de)

**USV** Uninterruptible power supply.

**UTP** Unshielded Twisted-Pair. Cable with unshielded twisted pairs of wires, generally with 4 pairs. --> STP

**VLAN** Virtual LAN, set up with switches. Goal: Limiting broadcasts to the network areas where the broadcast is useful. Is also used to subdivide networks for security reasons.

**VPN** Virtual Private Network A VPN joins a number of separate private networks (subnetworks) into a common network via a public network, e.g. the Internet. Confidentiality and authenticity is protected through the use of cryptographic protocols. A VPN thus offers a cost-effective alternative to dedicated lines when setting up a trans-regional company network.

**VRRP** Virtual Redundant Router Protocol. Protocol for controlling redundant routers. See also HSRP.

**WAN** Wide Area Network Public data and transfer network for connecting local networks. Transmission protocols: ISDN, frame relay, X.21 SDH, SONET, ATM.

**WDM** Wavelength Division Multiplex.

**WEP** Wired Equivalent Privacy. WEP is an encryption method in wireless LANs according to 802.11 for protecting the transmitted data.

**WFQ** Weighted Fair Queuing. Method for processing the priority queues in a switch. For example, the highest queue receives 50% of the bandwidth, the next 25%, etc. .

**WiFi** Wireless Fidelity. WiFi is a certification for wireless LANs (WLANs) according to standard 802.11, implemented by the WECA (Wireless Ethernet Compatibility Alliance). This certification confirms the interoperability of WLAN products. --> <http://www.wi-fi.net>

**Wireless LAN** Local Networks, that operate without cable connections.

**Wire-speed**, forwarding of the data packets with line speed.

**WLAN Wireless** --> LAN. According to IEEE 802.11, .15, .16 (Bluetooth).

**WDM** With the WDM system (Wide Wavelength Division Multiplex) it is possible to increase the transmission capacity of the optical fibres in fibre-optic networks. To do this, the system multiplexes a number of single-mode optical signals of various wavelengths to form a composite optical signal. In this manner several applications can be transmitted at the same time over a single fibre-optic cable pair. This means that it is not necessary to install additional fibre-optic cables, thus significantly reducing costs.

**WWW** World Wide Web.

**X.25** Data Packet Control Protocol, that is used in Datex-P, for example.

**XML** Extended Markup Language.

**XNS** Xerox Network Systems.

# Part number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
104301	26	475400.0100	34								
104302	27	475400.0150	34								
104303	27	475400.0200	34								
104307	26	475400.0500	34								
104331	26	475500.0200	35								
104335	26	475500.0500	35								
104336	26	475500.1000	35								
104337	27	490105	48								
104338	26	490106	48								
104347	27	490128	40								
104379	27	490129	40								
104396	27	490138	40								
104397	26	490151	41								
104401	27	490152	41								
192000.0100	32	490153	41								
192010.0100	32	490166	42								
192013.0030	36	490167	45								
192013.0060	36	490168	46								
192013.0100	36	490174	39								
192013.0150	36	490175	39								
192013.0200	36	490176	39								
192013.0500	36	490177	39								
192014.0030	29	490178	41								
192014.0060	29	491075	47								
192014.0100	29	492075	47								
192014.0150	29	772000	16								
192014.0200	29	772001	16								
192014.0500	29	772002	18								
192015.0030	37	772003	18								
192015.0060	37	772005	21								
192015.0100	37	772007	21								
192015.0150	37	772010	17								
192015.0200	37	772011	17								
192015.0500	37	772012	19								
192016.0030	30	772014	20								
192016.0060	30	772020	22								
192016.0100	30	772021	22								
192016.0150	30	772022	23								
192016.0200	30	779200.0401	14								
192016.0500	30	779200.0801	15								
192017.0030	38	779201.0401	14								
192017.0060	38	779201.0801	15								
192017.0100	38										
192017.0150	38										
192017.0200	38										
192017.0500	38										
192018.0030	31										
192018.0060	31										
192018.0100	31										
192018.0150	31										
192018.0200	31										
192018.0500	31										
192022.0100	32										
192030.0100	32										
192050.0100	32										
192100.0100	32										
192112.0100	32										
192130.0100	32										
192201.0100	32										
192300.0100	32										
475300.0200	33										
475300.0500	33										
475300.1000	33										
475400.0030	34										
475400.0060	34										



# Certificates



## NWQG7.E332878 Information Technology Equipment Including Electrical Business Equipment Certified for Canada

[Page Bottom](#)

### Information Technology Equipment Including Electrical Business Equipment Certified for Canada

[See General Information for Information Technology Equipment Including Electrical Business Equipment Certified for Canada](#)

**FRIEDRICH LUETZE GMBH** E332878  
Bruckwiesenstrasse 17-19  
71384 Weinstadt, GERMANY

**Industrial PoE Splitter**, Model(s) ET-PSPET

**Industrial Switch**, Model(s) ET-SWGU18ST, ET-SWGUSET, ET-SWGU5ST, ET-SWU4-1STC, ET-SWU4-2STC, ET-SWUSET, ET-SWU5ST, ET-SWUBET, ET-SWUBST, MC-2030, MC-2031, MC-2032, MC-2033

**Industrial Switch Hub**, Model(s) ET-SWGU8ST

**PoE Injector Industrial Switch**, Model(s) ET-PUSST

[Last Updated](#) on 2014-09-23

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".



## NWQG.E332878 Information Technology Equipment Including Electrical Business Equipment

[Page Bottom](#)

### Information Technology Equipment Including Electrical Business Equipment

[See General Information for Information Technology Equipment Including Electrical Business Equipment](#)

**FRIEDRICH LUETZE GMBH** E332878  
Bruckwiesenstrasse 17-19  
71384 Weinstadt, GERMANY

**Industrial PoE Splitter**, Model(s) ET-PSPET

**Industrial Switch**, Model(s) ET-SWGU18ST, ET-SWGUSET, ET-SWGU5ST, ET-SWU4-1STC, ET-SWU4-2STC, ET-SWUSET, ET-SWU5ST, ET-SWUBET, ET-SWUBST, MC-2030, MC-2031, MC-2032, MC-2033

**Industrial Switch Hub**, Model(s) ET-SWGU8ST

**PoE Injector Industrial Switch**, Model(s) ET-PUSST

[Last Updated](#) on 2014-09-23

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".



## DUXR7.E326112 Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories Certified for Canada

[Page Bottom](#)

### Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories Certified for Canada

[See General Information for Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories Certified for Canada](#)

**FRIEDRICH LUETZE GMBH** E326112  
Bruckwiesenstrasse 17-19  
71384 Weinstadt, GERMANY

**RJ45 Angle Plugs**, Model(s) 490151, 490152, 490153, 490178

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat. 5e (P/N 492075) (\*12)

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat. 6 (P/N 491075) (\*12)

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat.3 (P/N 490075) (\*12)

**STP Plug**, Model(s) 490128, 490129, 490174, 490175, 490176, 490177

**USB Coupler Module**, Model(s) USB-3.0 A/A F/F (P/N 490112) (\*12)

**USB Patch Cord**, Model(s) USB-3.0 A/A F/M x.M (P/N 490113.xxxx) (\*12), where suffixes denote cable length in meters.

(\*12) - Denotes additional rating of Type 12

NOTE - Models are intended for indoor use in telecommunication loop circuits or for use in Industrial Ethernet applications. circuits, such as Industrial Ethernet applications.

[Last Updated](#) on 2017-10-03

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".



## DUXR.E326112 Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories

[Page Bottom](#)

### Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories

[See General Information for Communications-, Audio/Video-, Data- and Other Signaling-circuit Accessories](#)

**FRIEDRICH LUETZE GMBH** E326112  
Bruckwiesenstrasse 17-19  
71384 Weinstadt, GERMANY

**Modular Jacks**, Model(s) 490166 / MDT-RJ45 F 8pol. CAT6A

**RJ45 Angle Plugs**, Model(s) 490151, 490152, 490153, 490178

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat. 5e (P/N 492075) (\*12)

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat. 6 (P/N 491075) (\*12)

**RJ45/RJ45 Coupler Module**, Model(s) RJ45 F/F 8/B Cat.3 (P/N 490075) (\*12)

**STP Plug**, Model(s) 490128, 490129, 490174, 490175, 490176, 490177

**USB Coupler Module**, Model(s) USB-3.0 A/A F/F (P/N 490112) (\*12)

**USB Patch Cord**, Model(s) USB-3.0 A/A F/M x.M (P/N 490113.xxxx) (\*12), where suffixes denote cable length in meters.

(\*12) - Denotes additional rating of Type 12

NOTE - Models are intended for indoor use in telecommunication loop circuits or for use in Industrial Ethernet applications. circuits, such as Industrial Ethernet applications.

[Last Updated](#) on 2017-10-03

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

© 2017 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".

**Copyright**

Protected trademarks and trade names are not always labelled as such in this publication. This does not mean they are free names as defined in the trademark and brand mark law. Publication does not imply that the descriptions or pictures used are free from rights of third parties. The information is published without regard to possible patent protection. Trade names are used without any guarantee that they can be used freely. In putting together text, pictures and data, we proceeded with the greatest care. Despite this, the possibility of errors cannot be completely excluded. We therefore reject any legal responsibility or liability. We are, of course, grateful for any recommendations for improvement or information useful for making corrections or establishing the truth. But the author does not assume any responsibility for the content of these documents.



### Cable Solutions

High flexing cables for industrial applications

### Connectivity Solutions

Industrial Ethernet, assembled cables, Actuator Sensor Interface, connectors and suppression technology

### Cabinet Solutions

*AirSTREAM* complete system for thermally optimized and space-saving cabinet wiring

### Control Solutions

Industrial Power Supply and electronic current control for Industrial Internet of Things. Infrastructure for industrial networks, signal converter, relays and modular electronics housing

### Transportation Solutions

Solutions for the exacting Railway Sector, for example control technology, Interface solutions and signalling

### Germany

Friedrich Lütze GmbH  
Postfach 12 24 (PLZ 71366)  
Bruckwiesenstraße 17-19  
D-71384 Weinstadt  
Tel.: +49 71 51 60 53-0  
Fax: +49 71 51 60 53-277(-288)  
info@luetze.de

### USA

LUTZE INC.  
13330 South Ridge Drive  
Charlotte, NC 28273  
Tel.: +1 704 504-0222  
Fax: +1 704 504-0223  
info@luetze.com

### United Kingdom

LÜTZE Ltd.  
Unit 3 Sandy Hill Park  
Sandy Way, Amington  
Tamworth, Staffs, B77 4DU  
Tel.: +44 1827 313330  
Fax: +44 1827 313332  
sales.gb@luetze.co.uk

### Austria

LÜTZE Elektrotechnische  
Erzeugnisse Ges.m.b.H.  
office@luetze.at

### Switzerland

LÜTZE AG  
info@luetze.ch

### France

LUTZE SASU  
info@lutze.fr

### Spain

LUTZE, S.L.  
info@lutze.es

### China

Luetze Trading (Shanghai) Co.Ltd.  
info@luetze.cn

SkyBLUE  
LUTZE



RoHS

www.lutze.com

LUTZE  
SYSTEMATIC TECHNOLOGY